



GOVERNMENT OF WEST BENGAL
DIRECTORATE OF FORESTS
OFFICE OF THE DIVISIONAL FOREST OFFICER,
PANCHET DIVISION

Satyajit Sarani, Bishnupur, Bankura
Phone & Fax No.. 03244-252189, E-mail: dfopanbis-wb@nic.in,
Website: www.bankuraforest.in



Quotation No. 44/Repair cum Maint. of Submersible Pump of 2025-26(VP)

Dated, Bishnupur, the: 31 / 12 / 2025

In terms of Finance Department Audit Branch Govt. of West Bengal's Memorandum No. 5400-F(Y) dated 25-06-2012 sealed quotations are invited from bonafide experienced and reliable resourceful agencies having experience in any Govt. /Semi Govt. / Govt. Under takings for providing various categories services as detailed in schedule below subject to the following conditions. Quotations should be addressed to the undersigned in sealed cover by name as well as official designation **Shri Abhijit Kar, WBFS, Divisional Forest Officer, Panchet Division, Bishnupur.**

Quotation for Repair cum Maint. of Submersible Pump (1 No.) at Harabati Mouza, J.L. No.-127 (N 23°01'04.28" & E 087°16'51.03"), of Bishnupur I Beat, Bishnupur Range under Panchet Division. (On Contract)

Copy of Estimate Enclosed (CDS-1)

Range	Beat	Mouza & J.L	Quantity	Project Cost
Bishnupur	Bishnupur-I	Harabati Mouza, J.L. No.-127	01 No.	95,702.00

CONDITIONS

1. The Quotation should be submitted in **sealed cover**. **Quotation No., Bidder's Name & Address should be properly mentioned on the envelope. Incomplete Quotation paper or documents or envelope will be rejected.**
2. The Contractor should **quote the rates, Percentage (%) in figures as well as in words.**
3. The materials to be supplied must be approved by the concerned Authority.
4. If any defects or issues are found with the supplied materials, it will likely need to be replaced with materials that meet the necessary standards. This is to be ensured that the safety and quality of the materials being used in whatever application they are intended for meets Standard specifications as per PWD.
5. **The Contractors should submit Income-Tax, Sales Tax and Professional Tax Clearance Certificate, GST Certificate, PAN, Aadhaar & Trade License. Incomplete Quotation will be summarily rejected.**
6. Acceptance of lowest quotation is not obligatory and the undersigned reserves the right to accept or reject any or all of the quotations without assigning any reason whatsoever.
7. **The estimated rate is inclusive of all Taxes. The quotationer should quote their rate accordingly.**
8. **Bill has to be submitted with detailed break up of GST (CGST & SGST) as per the prevalent Govt. Order in this respect. All Taxes will be deducted from the gross bill as per Govt. rule.**
9. **For complying with Mahatma-Shree, the employment should first be offered to "Job Card Holders" from the fringe villagers and L1 Bidders/Contractors getting Work Order have to compulsorily submit the details as per Annexure-VI, as mandated under the scheme.**
10. Sealed Quotation will be received up to **14/01/2026 & Opened on 15/01/2026 at 11:30 A.M.**
11. The Bidders should submit PAN- Aadhaar link screen shot for authentication of PAN-Aadhaar being already linked.

Divisional Forest Officer,
Panchet Division, Bishnupur

No. 2364 (9)/02-08

Dated, Bishnupur, the: 31 / 12 / 2025

Copy forwarded for information to and wide circulation to:

1. The Chief Conservator of Forests, Central Circle, West Bengal.
2. The District Magistrate & Collector, Bankura
3. The Divisional Forest Officer, Bankura South Division, Bankura North Division & Working Plan (South) Division -II
4. The Sub- Divisional Officer, Bishnupur.
5. The Assistant Divisional Forest Officer, Panchet Division, Bishnupur.
6. The All Range Officers, Panchet Division with request to affix in the Range Notice board for wide publication.
7. Head Clerk, Panchet Division for Office Notice Board.
8. Account & Budget Section of Panchet Division.
9. Notice Board at Division Office.

Divisional Forest Officer,
Panchet Division, Bishnupur

6(A)

842.

(ANNEXURE) CDS-1

ESTIMATE FOR REPAIRING OF SUBMERSIBLE PUMP AND 2 NOS PLATFORM MOUZA-Harabati, JL. NO-127 , BEAT-Bishnupur I ,IN BISHNUPUR RANGE UNDER PANCHET DIVISION BISHNUPUR

1	Supplying & Fixing KSB make submersible pump(1 HP) including supply of stub (both end flanged) pipe necessary clamps, pressure gauge, electrical fittings including all cables (6 sq mm flat copper), star delta starter panel set, cover all complete. (As per Vetted rate by Superending Engineer, South West Electrical Circle,PWD.)	1	NOS	14500.00	14500.00
2	S & Installation 220V 1 HP composit control panel digital type (make Crompton Greavs) with angle iron frame with nut bolt asher. (As per Vetted rate by Superending Engineer, South West Electrical Circle,PWD.)	1	NOS	3367.00	3367.00
3	Supply of PVC pipes & fittings Schedule 80 (medium duty) conforming to ASTMD - 1785 and threaded to match with GI Pipes as per IS : 1239(Part - I) According to PWD Schedule 2017 (volume II) Page-13 & 14/It.no-19(III) A & B				
	80 mm dia pvc pipe	15	METRE	576.00	8640.00
	80 mm dia soket	6	NOS	180.00	1080.00
4	Supplying, fitting and fixing PVC pipes for underground work of approved make of Schedule 80 (medium duty) conforming to ASTMD -1785 and threaded to match with GI Pipes as per IS : 1239 (Part - I). with all necessary accessories, specials viz. socket, bend, tee, union, cross, elbo, nipple, longscrow, reducing socket, reducing tee, short piece etc. fitted including cost of all materials ,jointing materials, cutting pipes, making threads ,cutting trenches upto 1.5 metre below surface in all sorts of soil and refilling the same as directed complete in all respect. (Payment will be made on the centre line easurement of the total pipe line including all specials No separate Payment will be made for accessories, specials.) PVC Pipes. PWD Schedule 2017(volume II)Page-12/It.no-19 II				
	25 mm dia	64	METRE	191.00	12224.00
5	Supplying, fitting and fixing steel cutter piece upto 450 mm long with sockets. According to PWD Schedule 2017(volume II)Page-53/It.no-9	1	EACH	403.00	403.00
6	Supply of PVC pipes & fittings Schedule 80 (medium duty) conforming to ASTMD - 1785 and threaded to match with GI Pipes as per IS : 1239 (Part - I). (L) Reducing Socket (mm X mm) 150 X 80. PWD Schedule 2017 (volume II) Page-13/It.no-19(III)	1	EACH	455.00	455.00
7	Lowering of Submersible Pump Motor Set with the use of contractor's own use tools, tackles & labours as per direction of E.I.C. (As per Vetted rate by Superending Engineer, South West Electrical Circle,PWD.)	1	ITEM	2192.36	2192.36

8	S & F being Rope Clamp with Nut Bolts & Washer (As per Vetted rate by Superending Engineer, South West Electrical Circle,PWD.)				6	NOS	61.88	371.28
9	Washing and developing tube well with air compressor pump and engine for 8 (eight) hours continuous pumping per day with necessary arrangements for testing the yield in gallons per hour with 'V' notch including hire and labour charges for all tools and plants and scaffolding as required. According to PWD Schedule 2017(volume II)Page-55/lt.no-20				1	DAY	7538.00	7538.00
10	Supplying, fitting and fixing PVC pipes of approved make of Schedule 80 (medium duty) conforming to ASTM D - 1785 and threaded to match with GI Pipes as per IS : 1239 (Part - I). with all necessary accessories, specials viz. socket, bend, tee, union, cross, elbo, nipple, long screw, reducing socket, reducing tee, short piece etc. fitted with holder bats clamps, including cutting pipes, making threads, fitting, fixing etc. complete in all respect including cost of all necessary fittings as required, jointing materials and two coats of painting with approved paint in any position above ground. (Payment will be made on the centre line measurements of total pipe line including all specials. No separate payment will be made for accessories, specials. Payment for painting will be made separately) PWD Schedule 2017(volume II)Page-12/lt.no-19 I							
	15 mm dia				58	METER	101.00	5858.00
	20 mm dia				36	METER	129.00	4644.00
	25 mm dia				24	METER	177.00	4248.00
11	Supplying, fitting and fixing self closing C.P. water tap of approved brand and make - 15 mm dia. According to PWD Schedule 2017(volume II)Page-10/lt.no-15GC				6	NOS	273.00	1638.00
12	Earth work in excavation of foundation trenches or drains, in all sorts of soil (including mixed soil but excluding laterite or sandstone) including removing, spreading or stacking the spoils within a lead of 75m. as directed. The item includes necessary trimming the sides of trenches, levelling, dressing and ramming the bottom, bailing out water as required complete. (a) Depth of excavation not exceeding 1,500 mm. According to PWD Schedule, 2017Page-1/lt. no-2(a)							
	foundation	2	6.000	0.250	0.300	0.900		
	TOTAL				0.900	% Cum	11927.00	107.34
13	Filling in foundation or plinth by silver sand in layers not exceeding 150 mm as directed and consolidating the same by thorough saturation with water, ramming complete including the cost of supply of sand. (payment to be made on measurement of finished quantity). According to PWD Schedule							
		2	1.500	1.500	0.100	0.450		
		2	6.000	0.250	0.075	0.225		
	TOTAL				0.675	% Cum	37521.00	253.27

14	Single Brick Flat Soling of picked jhama bricks including ramming and dressing bed to proper level and filling joints with local sand. According to PWD Schedule 2017 Page-14/lt. no-1								
		2	2.000	1.500		6.000			
		TOTAL				6.000	m ²	293.00	1758.00
15	Ordinary Cement concrete (mix 1:2:4) with graded stone chips (20 mm nominal size) excluding shuttering and reinforcement, if any, in ground floor as per relevant IS codes. According to PWD Schedule 2017 Page-24/lt. No-4(a)								
		2	6.000	0.150	0.075	0.135			
		2	1.500	1.500	0.075	0.338			
		TOTAL				0.473	m ³	4218.00	1995.11
16	Brick work with 1st class bricks in cement mortar (1:6) According to PWD Schedule, 2017 Page-15/lt. No-8								
	A) In Foundation & Plinth.... Page-15/lt. No-8(a)								
	I) OUTER WALL	2	6.00	0.250	0.250	0.750			
		TOTAL				0.750	m ³	4695.00	3521.25
17	Plaster (to wall, floor, ceiling etc.) with sand and cement mortar including rounding off or chamfering corners as directed and raking out joints including throating, nosing and drip course, scaffolding/staging where necessary (Ground floor).[Excluding cost of chipping over concrete surface]with 1:6 cement mortar,20mm thick plaster. According to PWD Schedule 2017 Page-189/lt.no -2(i)b								
		2	6.00		0.375	4.500			
		2	1.500		1.500	4.500			
		TOTAL				9.000	m ²	153.000	1377.00

18	Neat cement punning about 1.5mm thick in wall,dado>window sill,floor etc. NOTE:Cement 0.152 cu.m per100 sq.m. According to PWD Schedule 2017 Page-192/It.no-15				
	TOTAL	9.000	m ²	34.00	306.00
(A) CIVIL COST					76476.61
(B) ELECTRIFICATION COST FOR CONNECTION *					3823.83
(1) Sub-total Cost (A+B)					80300.44
(2) 18% GST, as applicable on sl no 1					14454.08
(3) Cost of civil works excluding labour welfare cess sl no. (1+2)					94754.52
(4) Labour welfare cess @1% on sl no 3					947.55
(5) Contingency Charge @ 3% is to be considered on Sl. No. – (3)					2842.64
(6) TOTAL AMOUNT (3+4+5)					98544.71
SAY					98545.00
(IN WORDS: NINETY EIGHT THOUSAND FIVE HUNDRED FORTY FIVE) ONLY					

* Electrification cost for repairing of 1 H.P Submersible pump has kept at around 5% of total civil cost and has been found feasible from previous experience of carried out similar nature of work.

ANUP MAHATA
(Reg.-01293) D.C E.
Khatra, Bankura



Divisional Forest Officer
Panchet Division
Bishnupur




Divisional Forest Officer
Panchel Division, Bishnupur

75
150
75
75
100

X

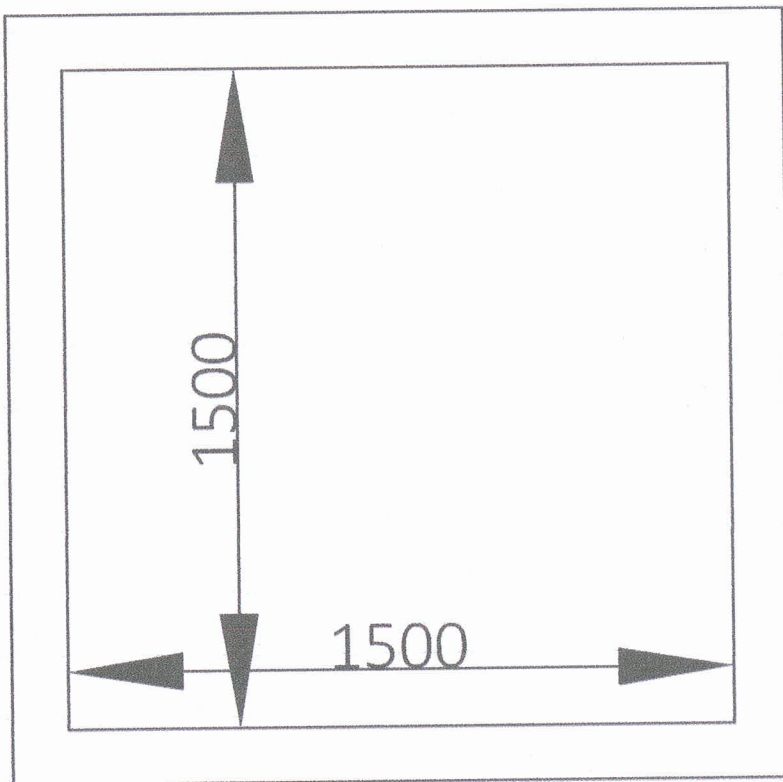

PLAN

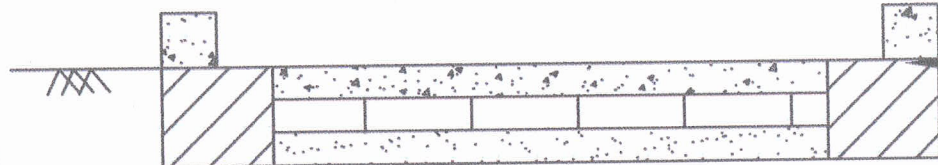

SECTION AT X-X'

150/75TH.P.C.C Railing

75TH.P.C.C

75TH.S.B.F.S.

150TH SAND FILLING

DR. V. K. SINGH
(Reg.-01293) D.C.E.
Khatra, Barikur,



GOVERNMENT OF WEST BENGAL
DIRECTORATE OF FORESTS
OFFICE OF THE DIVISIONAL FOREST OFFICER,
PANCHET DIVISION

Satyajit Sarani, Bishnupur, Bankura
Phone & Fax No.. 03244-252189, E-mail: dfopanbis-wb@nic.in,
Website: www.bankuraforest.in



Quotation No. 45/ Repair cum Maint. of Submersible Pump of 2025-26 (VP)

Dated, Bishnupur, the: 31 / 12 / 2025

In terms of Finance Department Audit Branch Govt. of West Bengal's Memorandum No. 5400-F(Y) dated 25-06-2012 sealed quotations are invited from bonafide experienced and reliable resourceful agencies having experience in any Govt. /Semi Govt. / Govt. Under takings for providing various categories services as detailed in schedule below subject to the following conditions. Quotations should be addressed to the undersigned in sealed cover by name as well as official designation **Shri Abhijit Kar, WBFS, Divisional Forest Officer, Panchet Division, Bishnupur.**

Quotation for Repair cum Maint. of Submersible Pump at Jharia Mouza, J.L. No.- 122, 01 No. (N 23°02'32.42" E 087°17'38.03") of Bishnupur I Beat, Bishnupur Range under Panchet Division. (On Contract)

Copy of estimate Enclose(CDS-02)

Range	Beat	Mouza & JL No.	Quantity	Project Cost
Bishnupur	Bishnupur I	Jharia Mouza, J.L. No.- 122	01 No.	95,702.00

CONDITIONS

1. The Quotation should be submitted in **sealed cover**. **Quotation No., Bidder's Name & Address should be properly mentioned on the envelope. Incomplete Quotation paper or documents or envelope will be rejected.**
2. The Contractor should **quote the rates, Percentage (%) in figures as well as in words.**
3. The materials to be supplied must be approved by the concerned Authority.
4. If any defects or issues are found with the supplied materials, it will likely need to be replaced with materials that meet the necessary standards. This is to be ensured that the safety and quality of the materials being used in whatever application they are intended for meets Standard specifications as per PWD.
5. **The Contractors should submit Income-Tax, Sales Tax and Professional Tax Clearance Certificate, GST Certificate, PAN, Aadhaar & Trade License. Incomplete Quotation will be summarily rejected.**
6. Acceptance of lowest quotation is not obligatory and the undersigned reserves the right to accept or reject any or all of the quotations without assigning any reason whatsoever.
7. **The estimated rate is inclusive of all Taxes. The quotationer should quote their rate accordingly.**
8. **Bill has to be submitted with detailed break up of GST (CGST & SGST) as per the prevalent Govt. Order in this respect. All Taxes will be deducted from the gross bill as per Govt. rule.**
9. **For complying with Mahatma-Shree, the employment should first be offered to "Job Card Holders" from the fringe villagers and L1 Bidders/Contractors getting Work Order have to compulsorily submit the details as per Annexure-VI, as mandated under the scheme.**
10. Sealed Quotation will be received up to **14/01/2026 & Opened on 15/01/2026 at 11:30 A.M.**
11. The Bidders should submit PAN- Aadhaar link screen shot for authentication of PAN-Aadhaar being already linked.

Divisional Forest Officer,
Panchet Division, Bishnupur

No. 2365 (9)/02-08

Dated, Bishnupur, the: 31 / 12 / 2025

Copy forwarded for information to and wide circulation to:

1. The Chief Conservator of Forests, Central Circle, West Bengal.
2. The District Magistrate & Collector, Bankura
3. The Divisional Forest Officer, Bankura South Division, Bankura North Division & Working Plan (South) Division -II
4. The Sub- Divisional Officer, Bishnupur.
5. The Assistant Divisional Forest Officer, Panchet Division, Bishnupur.
6. The All Range Officers, Panchet Division with request to affix in the Range Notice board for wide publication.
7. Head Clerk, Panchet Division for Office Notice Board.
8. Account & Budget Section of Panchet Division.
9. Notice Board at Division Office.

Divisional Forest Officer,
Panchet Division, Bishnupur

(ANNEXURE) CDS 2

ESTIMATE FOR REPAIRING OF SUBMERSIBLE PUMP AND 2 NOS PLATFORM MOUZA-Jharia, JL. NO-122 , BEAT-Bishnupur I UNDER BISHNUPUR RANGE UNDER PANCHET DIVISION BISHNUPUR

1	Supplying & Fixing KSB make submersible pump(1 HP) including supply of stub (both end flanged) pipe necessary clamps, pressure gauge, electrical fittings including all cables (6 sq mm flat copper), star delta starter panel set, cover all complete. (As per Vetted rate by Superending Engineer, South West Electrical Circle,PWD.)	1	NOS	14500.00	14500.00
2	S & Installation 220V 1 HP composite control panel digital type (make Crompton Greaves) with angle iron frame with nut bolt asher. (As per Vetted rate by Superending Engineer, South West Electrical Circle,PWD.)	1	NOS	3367.00	3367.00
3	Supply of PVC pipes & fittings Schedule 80 (medium duty) conforming to ASTM D - 1785 and threaded to match with GI Pipes as per IS : 1239(Part - I) According to PWD Schedule 2017 (volume II) Page-13 & 14/It.no-19(III) A & B				
	80 mm dia pvc pipe	15	METRE	576.00	8640.00
	80 mm dia socket	6	NOS	180.00	1080.00
4	Supplying, fitting and fixing PVC pipes for underground work of approved make of Schedule 80 (medium duty) conforming to ASTM D -1785 and threaded to match with GI Pipes as per IS : 1239 (Part - I). with all necessary accessories, specials viz. socket, bend, tee, union, cross, elbow, nipple, long screw, reducing socket, reducing tee, short piece etc. fitted including cost of all materials, jointing materials, cutting pipes, making threads, cutting trenches upto 1.5 metre below surface in all sorts of soil and refilling the same as directed complete in all respect. (Payment will be made on the centre line measurement of the total pipe line including all specials No separate Payment will be made for accessories, specials.) PVC Pipes. PWD Schedule 2017(volume II)Page-12/It.no-19 II				
	25 mm dia	64	METRE	191.00	12224.00
5	Supplying, fitting and fixing steel cutter piece upto 450 mm long with sockets. According to PWD Schedule 2017(volume II)Page-53/It.no-9	1	EACH	403.00	403.00
6	Supply of PVC pipes & fittings Schedule 80 (medium duty) conforming to ASTM D - 1785 and threaded to match with GI Pipes as per IS : 1239 (Part - I). (L) Reducing Socket (mm X mm) 150 X 80. PWD Schedule 2017 (volume II) Page-13/It.no-19(III)	1	EACH	455.00	455.00
7	Lowering of Submersible Pump Motor Set with the use of contractor's own use tools, tackles & labours as per direction of E.I.C. (As per Vetted rate by Superending Engineer, South West Electrical Circle,PWD.)	1	ITEM	2192.36	2192.36

8	S & F being Rope Clamp with Nut Bolts & Washer (As per Vetted rate by Superending Engineer, South West Electrical Circle,PWD.)				6	NOS	61.88	371.28
9	Washing and developing tube well with air compressor pump and engine for 8 (eight) hours continuous pumping per day with necessary arrangements for testing the yield in gallons per hour with 'V' notch including hire and labour charges for all tools and plants and scaffolding as required. According to PWD Schedule 2017(volume II)Page-55/It.no-20				1	DAY	7538.00	7538.00
10	Supplying, fitting and fixing PVC pipes of approved make of Schedule 80 (medium duty) conforming to ASTM D - 1785 and threaded to match with GI Pipes as per IS : 1239 (Part - I). with all necessary accessories, specials viz. socket, bend, tee, union, cross, elbo, nipple, long screw, reducing socket, reducing tee, short piece etc. fitted with holder bats clamps, including cutting pipes, making threads, fitting, fixing etc. complete in all respect including cost of all necessary fittings as required, jointing materials and two coats of painting with approved paint in any position above ground. (Payment will be made on the centre line measurements of total pipe line including all specials. No separate payment will be made for accessories, specials. Payment for painting will be made separately) PWD Schedule 2017(volume II)Page-12/It.no-19 I							
	15 mm dia				58	METER	101.00	5858.00
	20 mm dia				36	METER	129.00	4644.00
	25 mm dia				24	METER	177.00	4248.00
11	Supplying, fitting and fixing self closing C.P. water tap of approved brand and make - 15 mm dia. According to PWD Schedule 2017(volume II)Page-10/It.no-15GC				6	NOS	273.00	1638.00
12	Earth work in excavation of foundation trenches or drains, in all sorts of soil (including mixed soil but excluding laterite or sandstone) including removing, spreading or stacking the spoils within a lead of 75m. as directed. The item includes necessary trimming the sides of trenches, levelling, dressing and ramming the bottom, bailing out water as required complete. (a) Depth of excavation not exceeding 1,500 mm. According to PWD Schedule, 2017Page-1/It. no-2(a)							
	foundation	2	6.000	0.250	0.300	0.900		
	TOTAL				0.900	% Cum	11927.00	107.34
13	Filling in foundation or plinth by silver sand in layers not exceeding 150 mm as directed and consolidating the same by thorough saturation with water, ramming complete including the cost of supply of sand. (payment to be made on measurement of finished quantity). According to PWD Schedule							
		2	1.500	1.500	0.100	0.450		
		2	6.000	0.250	0.075	0.225		
	TOTAL				0.675	% Cum	37521.00	253.27

14	Single Brick Flat Soling of picked jhama bricks including ramming and dressing bed to proper level and filling joints with local sand. According to								
	PWD Schedule 2017 Page-14/lt. no-1								
		2	2.000	1.500		6.000			
		TOTAL				6.000	m ²	293.00	1758.00
15	Ordinary Cement concrete (mix 1:2:4) with graded stone chips (20 mm nominal size) excluding shuttering and reinforcement, if any, in ground floor as per relevant IS codes. According to PWD Schedule 2017 Page-24/lt. No-4(a)								
		2	6.000	0.150	0.075	0.135			
		2	1.500	1.500	0.075	0.338			
		TOTAL				0.473	m ³	4218.00	1995.11
16	Brick work with 1st class bricks in cement mortar (1:6) According to PWD Schedule, 2017 Page-15/lt. No-8								
	A) In Foundation & Plinth.... Page-15/lt. No-8(a)								
	I) OUTER WALL	2	6.00	0.250	0.250	0.750			
		TOTAL				0.750	m ³	4695.00	3521.25
17	Plaster (to wall, floor, ceiling etc.) with sand and cement mortar including rounding off or chamfering corners as directed and raking out joints including throating, nosing and drip course, scaffolding/staging where necessary (Ground floor). [Excluding cost of chipping over concrete surface] with 1:6 cement mortar, 20mm thick plaster. According to PWD Schedule 2017 Page-189/lt. no -2(i)b								
		2	6.00		0.375	4.500			
		2	1.500		1.500	4.500			
		TOTAL				9.000	m ²	153.000	1377.00


18	Neat cement punning about 1.5mm thick in wall,dado>window sill,floor etc. NOTE:Cement 0.152 cu.m per100 sq.m. According to PWD Schedule 2017 Page-192/lt.no-15				
	TOTAL	9.000	m²	34.00	306.00
(A) CIVIL COST					76476.61
(B) ELECTRIFICATION COST FOR CONNECTION *					3823.83
(1) Sub-total Cost (A+B)					80300.44
(2) 18% GST, as applicable on sl no 1					14454.08
(3) Cost of civil works excluding labour welfare cess sl no. (1+2)					94754.52
(4) Labour welfare cess @1% on sl no 3					947.55
(5) Contingency Charge @ 3% is to be considered on Sl. No. – (3)					2842.64
(6) TOTAL AMOUNT (3+4+5)					98544.71
SAY					98545.00
(IN WORDS: NINETY EIGHT THOUSAND FIVE HUNDRED FORTY FIVE) ONLY					

* Electrification cost for repairing of 1 H.P Submersible pump has kept at around 5% of total civil cost and has been found feasible from previous experience of carried out similar nature of work.


ANUP MAHATA
(Reg.-01293) D.C E.
Khatra, Bankura


Divisional Forest Officer
Panchet Division
Bishnupur

Divisional Forest Officer
Panchet Division, Bishnupur

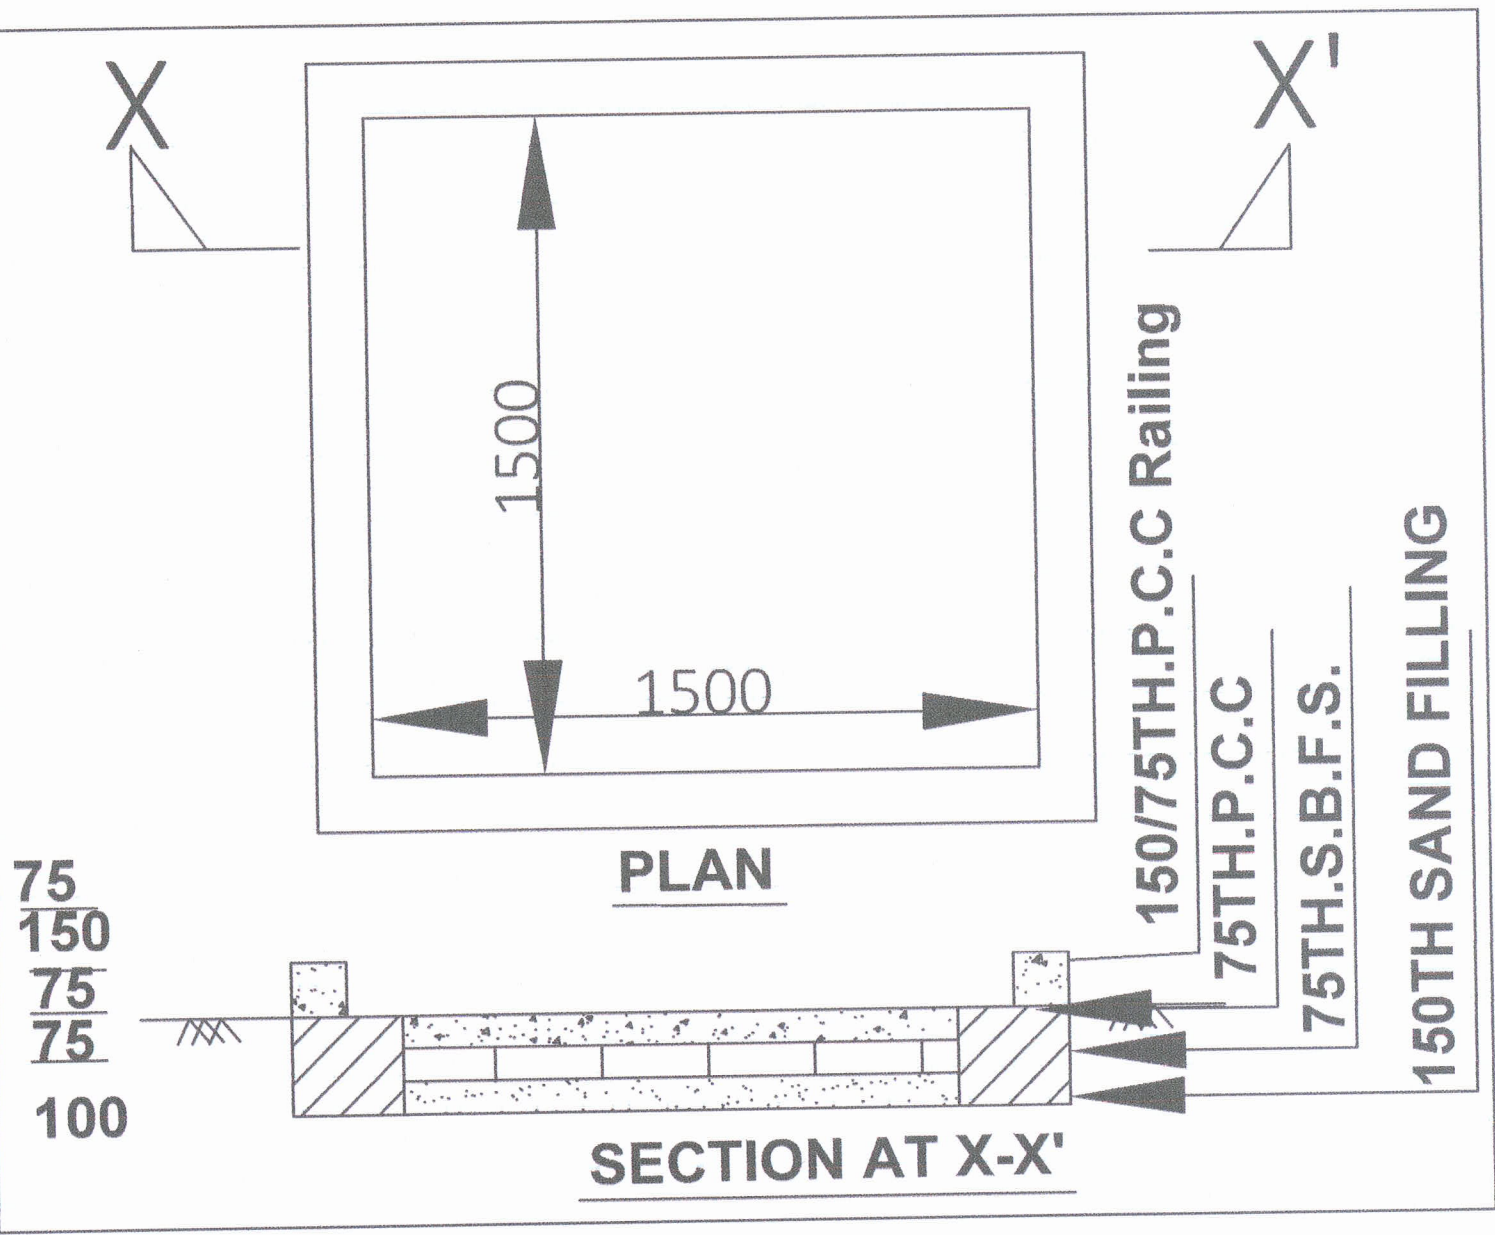

(Reg-01233) D.C.H.
Khatra, Bankura



GOVERNMENT OF WEST BENGAL
DIRECTORATE OF FORESTS
OFFICE OF THE DIVISIONAL FOREST OFFICER,
PANCHET DIVISION

Satyajit Sarani, Bishnupur, Bankura
Phone & Fax No.. 03244-252189, E-mail: dfopanbis-wb@nic.in,
Website: www.bankuraforest.in

Quotation No. 46/ Repair cum Maint. of Submersible Pump of 2025-26 (VP)

Dated, Bishnupur, the: 31 / 12 / 2025

In terms of Finance Department Audit Branch Govt. of West Bengal's Memorandum No. 5400-F(Y) dated 25-06-2012 sealed quotations are invited from bonafide experienced and reliable resourceful agencies having experience in any Govt. /Semi Govt. / Govt. Under takings for providing various categories services as detailed in schedule below subject to the following conditions. Quotations should be addressed to the undersigned in sealed cover by name as well as official designation **Shri Abhijit Kar, WBFS, Divisional Forest Officer, Panchet Division, Bishnupur.**

Quotation for Repair cum Maint. of Submersible Pump at Bhedua Mouza, J.L. No.- 291, 01 No. (N 23°01'57.6'' E 087°16'35.1'') of Bishnupur II Beat, Bishnupur Range under Panchet Division. (On Contract)

Copy of estimate Enclose (CDS-03)

Range	Beat	Mouza & JL No.	Quantity	Project Cost
Bishnupur	Bishnupur II	Bhedua Mouza, J.L. No.- 291	01 No.	95,702.00

CONDITIONS

1. The Quotation should be submitted in **sealed cover. Quotation No., Bidder's Name & Address should be properly mentioned on the envelope. Incomplete Quotation paper or documents or envelope will be rejected.**
2. The Contractor should **quote the rates, Percentage (%) in figures as well as in words.**
3. The materials to be supplied must be approved by the concerned Authority.
4. If any defects or issues are found with the supplied materials, it will likely need to be replaced with materials that meet the necessary standards. This is to be ensured that the safety and quality of the materials being used in whatever application they are intended for meets Standard specifications as per PWD.
5. **The Contractors should submit Income-Tax, Sales Tax and Professional Tax Clearance Certificate, GST Certificate, PAN, Aadhaar & Trade License. Incomplete Quotation will be summarily rejected.**
6. Acceptance of lowest quotation is not obligatory and the undersigned reserves the right to accept or reject any or all of the quotations without assigning any reason whatsoever.
7. **The estimated rate is inclusive of all Taxes. The quotationer should quote their rate accordingly.**
8. **Bill has to be submitted with detailed break up of GST (CGST & SGST) as per the prevalent Govt. Order in this respect. All Taxes will be deducted from the gross bill as per Govt. rule.**
9. **For complying with Mahatma-Shree, the employment should first be offered to "Job Card Holders" from the fringe villagers and L1 Bidders/Contractors getting Work Order have to compulsorily submit the details as per Annexure-VI, as mandated under the scheme.**
10. Sealed Quotation will be received up to **14/01/2026 & Opened on 15/01/2026 at 11:30 A.M.**
11. The Bidders should submit PAN- Aadhaar link screen shot for authentication of PAN-Aadhaar being already linked.

Divisional Forest Officer,
Panchet Division, Bishnupur

No. 2366 (9)/02-08

Dated, Bishnupur, the: 31 / 12 / 2025

Copy forwarded for information to and wide circulation to:

1. The Chief Conservator of Forests, Central Circle, West Bengal.
2. The District Magistrate & Collector, Bankura
3. The Divisional Forest Officer, Bankura South Division, Bankura North Division & Working Plan (South) Division -II
4. The Sub- Divisional Officer, Bishnupur.
5. The Assistant Divisional Forest Officer, Panchet Division, Bishnupur.
6. The All Range Officers, Panchet Division with request to affix in the Range Notice board for wide publication.
7. Head Clerk, Panchet Division for Office Notice Board.
8. Account & Budget Section of Panchet Division.
9. Notice Board at Division Office.

Divisional Forest Officer,
Panchet Division, Bishnupur

(ANNEXURE) CDS 3

ESTIMATE FOR REPAIRING OF SUBMERSIBLE PUMP AND 2 NOS PLATFORM MOUZA-Bhedua, JL. NO-291 , BEAT-Bishnupur II UNDER BISHNUPUR RANGE UNDER PANCHET DIVISION BISHNUPUR

1	Supplying & Fixing KSB make submersible pump(1 HP) including supply of stub (both end flanged) pipe necessary clamps, pressure gauge, electrical fittings including all cables (6 sq mm flat copper), star delta starter panel set, cover all complete. (As per Vetted rate by Superending Engineer, South West Electrical Circle,PWD.)	1	NOS	14500.00	14500.00
2	S & Installation 220V 1 HP composite control panel digital type (make Crompton Greaves) with angle iron frame with nut bolt asher. (As per Vetted rate by Superending Engineer, South West Electrical Circle,PWD.)	1	NOS	3367.00	3367.00
3	Supply of PVC pipes & fittings Schedule 80 (medium duty) conforming to ASTM D - 1785 and threaded to match with GI Pipes as per IS : 1239(Part - I) According to PWD Schedule 2017 (volume II) Page-13 & 14/It.no-19(III) A & B				
	80 mm dia pvc pipe	15	METRE	576.00	8640.00
	80 mm dia socket	6	NOS	180.00	1080.00
4	Supplying, fitting and fixing PVC pipes for underground work of approved make of Schedule 80 (medium duty) conforming to ASTM D -1785 and threaded to match with GI Pipes as per IS : 1239 (Part - I). with all necessary accessories, specials viz. socket, bend, tee, union, cross, elbow, nipple, long screw, reducing socket, reducing tee, short piece etc. fitted including cost of all materials ,jointing materials, cutting pipes, making threads ,cutting trenches upto 1.5 metre below surface in all sorts of soil and refilling the same as directed complete in all respect. (Payment will be made on the centre line easurement of the total pipe line including all specials No separate Payment will be made for accessories, specials.) PVC Pipes. PWD Schedule 2017(volume II)Page-12/It.no-19 II				
	25 mm dia	64	METRE	191.00	12224.00
5	Supplying, fitting and fixing steel cutter piece upto 450 mm long with sockets. According to PWD Schedule 2017(volume II)Page-53/It.no-9	1	EACH	403.00	403.00
6	Supply of PVC pipes & fittings Schedule 80 (medium duty) conforming to ASTM D - 1785 and threaded to match with GI Pipes as per IS : 1239 (Part - I). (L) Reducing Socket (mm X mm) 150 X 80. PWD Schedule 2017 (volume II) Page-13/It.no-19(III)	1	EACH	455.00	455.00
7	Lowering of Submersible Pump Motor Set with the use of contractor's own use tools, tackles & labours as per direction of E.I.C. (As per Vetted rate by Superending Engineer, South West Electrical Circle,PWD.)	1	ITEM	2192.36	2192.36

8	S & F being Rope Clamp with Nut Bolts & Washer (As per Vetted rate by Superending Engineer, South West Electrical Circle,PWD.)					6	NOS	61.88	371.28
9	Washing and developing tube well with air compressor pump and engine for 8 (eight) hours continuous pumping per day with necessary arrangements for testing the yield in gallons per hour with 'V' notch including hire and labour charges for all tools and plants and scaffolding as required. According to PWD Schedule 2017(volume II)Page-55/It.no-20					1	DAY	7538.00	7538.00
10	Supplying, fitting and fixing PVC pipes of approved make of Schedule 80 (medium duty) conforming to ASTM D - 1785 and threaded to match with GI Pipes as per IS : 1239 (Part - I). with all necessary accessories, specials viz. socket, bend, tee, union, cross, elbo, nipple, long screw, reducing socket, reducing tee, short piece etc. fitted with holder bats clamps, including cutting pipes, making threads,fitting, fixing etc. complete in all respect including cost of all necessary fittings as required,jointing materials and two coats of painting with approved paint in any position above ground. (Payment will be made on the centre line measurements of total pipe line including all specials. No separate payment will be made for accesories, specials. Payment for painting will be made seperately) PWD Schedule 2017(volume II)Page-12/It.no-19 I								
	15 mm dia					58	METER	101.00	5858.00
	20 mm dia					36	METER	129.00	4644.00
	25 mm dia					24	METER	177.00	4248.00
11	Supplying, fitting and fixing self closing C.P.water tap of approved brand and make - 15 mm dia. According to PWD Schedule 2017(volume II)Page-10/It.no-15GC					6	NOS	273.00	1638.00
12	Earth work in excavation of foundation trenches or drains, in all sorts of soil (including mixed soil but excluding laterite or sandstone) including removing, spreading or stacking the spoils within a lead of 75m. as directed. The item includes necessary trimming the sides of trenches, levelling, dressing and ramming the bottom, bailing out water as required complete. (a) Depth of excavation not exceeding 1,500 mm. According to PWD Schedule, 2017Page-1/It. no-2(a)								
	foundation	2	6.000	0.250	0.300	0.900			
	TOTAL					0.900	% Cum	11927.00	107.34
13	Filling in foundation or plinth by silver sand in layers not exceeding 150 mm as directed and consolidating the same by thorough saturation with water, ramming complete including the cost of supply of sand. (payment to be made on measurement of finished quantity). According to PWD Schedule								
		2	1.500	1.500	0.100	0.450			
		2	6.000	0.250	0.075	0.225			
	TOTAL					0.675	% Cum	37521.00	253.27

14	Single Brick Flat Soling of picked jhama bricks including ramming and dressing bed to proper level and filling joints with local sand. According to								
	PWD Schedule 2017 Page-14/lt. no-1								
		2	2.000	1.500		6.000			
		TOTAL			6.000	m ²	293.00	1758.00	
15	Ordinary Cement concrete (mix 1:2:4) with graded stone chips (20 mm nominal size) excluding shuttering and reinforcement, if any, in ground floor as per relevant IS codes. According to PWD Schedule 2017 Page-24/lt. No-4(a)								
		2	6.000	0.150	0.075	0.135			
		2	1.500	1.500	0.075	0.338			
		TOTAL			0.473	m ³	4218.00	1995.11	
16	Brick work with 1st class bricks in cement mortar (1:6) According to PWD Schedule, 2017 Page-15/lt. No-8								
	A) In Foundation & Plinth.... Page-15/lt. No-8(a)								
	I) OUTER WALL	2	6.00	0.250	0.250	0.750			
		TOTAL			0.750	m ³	4695.00	3521.25	
17	Plaster (to wall, floor, ceiling etc.) with sand and cement mortar including rounding off or chamfering corners as directed and raking out joints including throating, nosing and drip course, scaffolding/staging where necessary (Ground floor).[Excluding cost of chipping over concrete surface]with 1:6 cement mortar,20mm thick plaster. According to PWD								
	Schedule 2017 Page-189/lt.no -2(i)b								
		2	6.00		0.375	4.500			
		2	1.500		1.500	4.500			
		TOTAL			9.000	m ²	153.000	1377.00	


18	Neat cement punning about 1.5mm thick in wall,dado>window sill,floor etc. NOTE:Cement 0.152 cu.m per100 sq.m. According to PWD Schedule 2017 Page-192/lt.no-15				
		TOTAL	9.000	m ²	34.00
(A) CIVIL COST					76476.61
(B) ELECTRIFICATION COST FOR CONNECTION *					3823.83
(1) Sub-total Cost (A+B)					80300.44
(2) 18% GST, as applicable on sl no 1					14454.08
(3) Cost of civil works excluding labour welfare cess sl no. (1+2)					94754.52
(4) Labour welfare cess @1% on sl no 3					947.55
(5) Contingency Charge @ 3% is to be considered on Sl. No. – (3)					2842.64
(6) TOTAL AMOUNT (3+4+5)					98544.71
SAY					98545.00
(IN WORDS: NINETY EIGHT THOUSAND FIVE HUNDRED FORTY FIVE) ONLY					

* Electrification cost for repairing of 1 H.P Submersible pump has kept at around 5% of total civil cost and has been found feasible from previous experience of carried out similar nature of work.


ANUP MAHATA
(Reg.-01293) D.C E.
Khata, Bankura


Divisional Forest Officer
Panchet Division
Bishnupur


 Divisional Forest Officer
 Panchel Division, Bishnupur

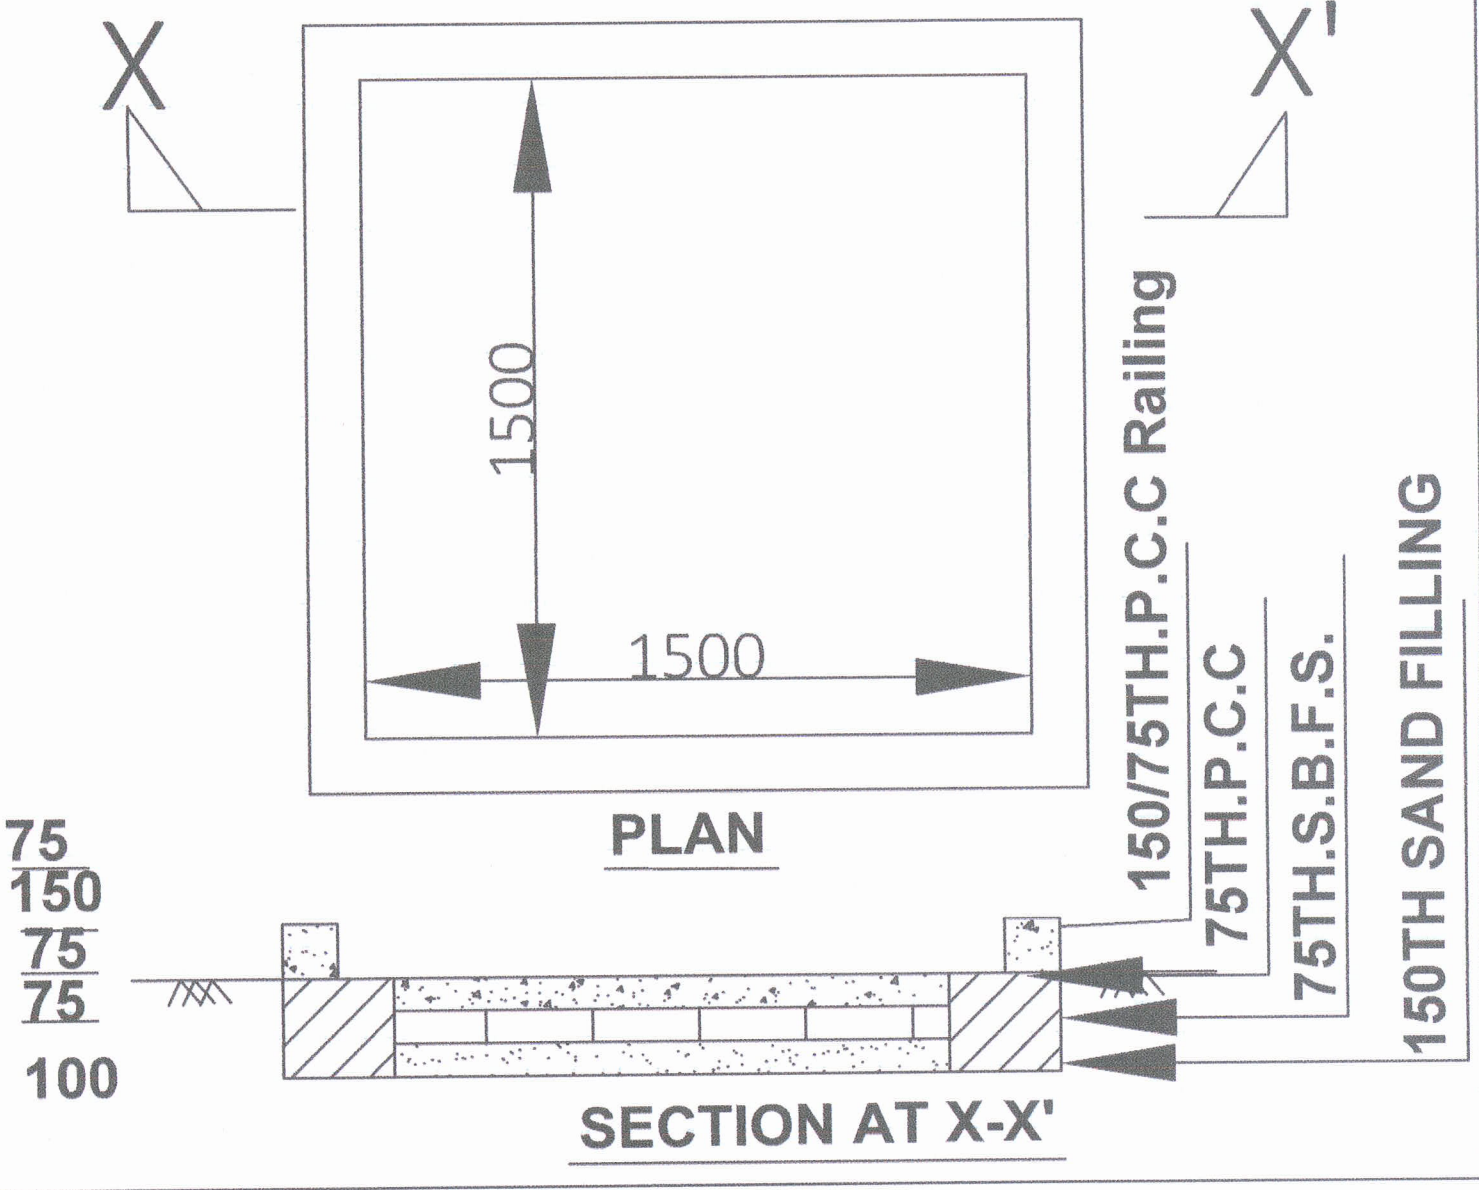


 (Reg.-01293) D.C.E.
 Panchel Division



GOVERNMENT OF WEST BENGAL
DIRECTORATE OF FORESTS
OFFICE OF THE DIVISIONAL FOREST OFFICER,
PANCHET DIVISION

Satyajit Sarani, Bishnupur, Bankura
Phone & Fax No.. 03244-252189, E-mail: dfopanbis-wb@nic.in,
Website: www.bankuraforest.in

Quotation No. 47/ Repair cum Maint. of Submersible Pump of 2025-26 (JP)

Dated, Bishnupur, the: 31 / 12 / 2025

In terms of Finance Department Audit Branch Govt. of West Bengal's Memorandum No. 5400-F(Y) dated 25-06-2012 sealed quotations are invited from bonafide experienced and reliable resourceful agencies having experience in any Govt. /Semi Govt. / Govt. Under takings for providing various categories services as detailed in schedule below subject to the following conditions. Quotations should be addressed to the undersigned in sealed cover by name as well as official designation **Shri Abhijit Kar, WBFS, Divisional Forest Officer, Panchet Division, Bishnupur.**

Quotation for Repair cum Maint. of Submersible Pump at Jangalmahal Mouza, J.L. No.- 85, 01 No. (N-23°04'54.24" E-87°22'35.89") of Machantala Beat, Joypur Range under Panchet Division. (On Contract)

Copy of estimate Enclose (CDS-04)

Range	Beat	Mouza & JL No.	Quantity	Project Cost
Joypur	Machantala	Jangalmahal Mouza, J.L. No.- 85	01 No.	95,702.00

CONDITIONS

1. The Quotation should be submitted in **sealed cover**. **Quotation No., Bidder's Name & Address should be properly mentioned on the envelope. Incomplete Quotation paper or documents or envelope will be rejected.**
2. The Contractor should **quote the rates, Percentage (%) in figures as well as in words.**
3. The materials to be supplied must be approved by the concerned Authority.
4. If any defects or issues are found with the supplied materials, it will likely need to be replaced with materials that meet the necessary standards. This is to be ensured that the safety and quality of the materials being used in whatever application they are intended for meets Standard specifications as per PWD.
5. **The Contractors should submit Income-Tax, Sales Tax and Professional Tax Clearance Certificate, GST Certificate, PAN, Aadhaar & Trade License. Incomplete Quotation will be summarily rejected.**
6. Acceptance of lowest quotation is not obligatory and the undersigned reserves the right to accept or reject any or all of the quotations without assigning any reason whatsoever.
7. **The estimated rate is inclusive of all Taxes. The quotationer should quote their rate accordingly.**
8. **Bill has to be submitted with detailed break up of GST (CGST & SGST) as per the prevalent Govt. Order in this respect. All Taxes will be deducted from the gross bill as per Govt. rule.**
9. **For complying with Mahatma-Shree, the employment should first be offered to "Job Card Holders" from the fringe villagers and L1 Bidders/Contractors getting Work Order have to compulsorily submit the details as per Annexure-VI, as mandated under the scheme.**
10. Sealed Quotation will be received up to **14/01/2026 & Opened on 15/01/2026 at 11:30 A.M.**
11. The Bidders should submit PAN- Aadhaar link screen shot for authentication of PAN-Aadhaar being already linked.

Divisional Forest Officer,
Panchet Division, Bishnupur

No. 2367(9)/02-08

Dated, Bishnupur, the: 31 / 12 / 2025

Copy forwarded for information to and wide circulation to:

1. The Chief Conservator of Forests, Central Circle, West Bengal.
2. The District Magistrate & Collector, Bankura
3. The Divisional Forest Officer, Bankura South Division, Bankura North Division & Working Plan (South) Division -II
4. The Sub- Divisional Officer, Bishnupur.
5. The Assistant Divisional Forest Officer, Panchet Division, Bishnupur.
6. The All Range Officers, Panchet Division with request to affix in the Range Notice board for wide publication.
7. Head Clerk, Panchet Division for Office Notice Board.
8. Account & Budget Section of Panchet Division.
9. Notice Board at Division Office.

Divisional Forest Officer,
Panchet Division, Bishnupur

(ANNEXURE) CDS 4

ESTIMATE FOR REPAIRING OF SUBMERSIBLE PUMP AND 2 NOS PLATFORM at MOUZA-Jangalmahal, JL. NO- 85 , BEAT-Machantala UNDER JOYPUR RANGE UNDER PANCHET DIVISION BISHNUPUR

1	Supplying & Fixing KSB make submersible pump(1 HP) including supply of stub (both end flanged) pipe necessary clamps, pressure gauge, electrical fittings including all cables (6 sq mm flat copper), star delta starter panel set, cover all complete. (As per Vetted rate by Superending Engineer, South West Electrical Circle,PWD.)	1	NOS	14500.00	14500.00
2	S & Installation 220V 1 HP composite control panel digital type (make Crompton Greaves) with angle iron frame with nut bolt asher. (As per Vetted rate by Superending Engineer, South West Electrical Circle,PWD.)	1	NOS	3367.00	3367.00
3	Supply of PVC pipes & fittings Schedule 80 (medium duty) conforming to ASTM D - 1785 and threaded to match with GI Pipes as per IS : 1239(Part - I) According to PWD Schedule 2017 (volume II) Page-13 & 14/It.no-19(III) A & B				
	80 mm dia pvc pipe	15	METRE	576.00	8640.00
	80 mm dia socket	6	NOS	180.00	1080.00
4	Supplying, fitting and fixing PVC pipes for underground work of approved make of Schedule 80 (medium duty) conforming to ASTM D -1785 and threaded to match with GI Pipes as per IS : 1239 (Part - I). with all necessary accessories, specials viz. socket, bend, tee, union, cross, elbow, nipple, long screw, reducing socket, reducing tee, short piece etc. fitted including cost of all materials ,jointing materials, cutting pipes, making threads ,cutting trenches upto 1.5 metre below surface in all sorts of soil and refilling the same as directed complete in all respect. (Payment will be made on the centre line easurement of the total pipe line including all specials No separate Payment will be made for accessories, specials.) PVC Pipes. PWD Schedule 2017(volume II)Page-12/It.no-19 II				
	25 mm dia	64	METRE	191.00	12224.00
5	Supplying, fitting and fixing steel cutter piece upto 450 mm long with sockets. According to PWD Schedule 2017(volume II)Page-53/It.no-9	1	EACH	403.00	403.00
6	Supply of PVC pipes & fittings Schedule 80 (medium duty) conforming to ASTM D - 1785 and threaded to match with GI Pipes as per IS : 1239 (Part - I). (L) Reducing Socket (mm X mm) 150 X 80. PWD Schedule 2017 (volume II) Page-13/It.no-19(III)	1	EACH	455.00	455.00
7	Lowering of Submersible Pump Motor Set with the use of contractor's own use tools, tackles & labours as per direction of E.I.C. (As per Vetted rate by Superending Engineer, South West Electrical Circle,PWD.)	1	ITEM	2192.36	2192.36

8	S & F being Rope Clamp with Nut Bolts & Washer (As per Vetted rate by Superending Engineer, South West Electrical Circle,PWD.)					6	NOS	61.88	371.28
9	Washing and developing tube well with air compressor pump and engine for 8 (eight) hours continuous pumping per day with necessary arrangements for testing the yield in gallons per hour with 'V' notch including hire and labour charges for all tools and plants and scaffolding as required. According to PWD Schedule 2017(volume II)Page-55/lt.no-20					1	DAY	7538.00	7538.00
10	Supplying, fitting and fixing PVC pipes of approved make of Schedule 80 (medium duty) conforming to ASTM D - 1785 and threaded to match with GI Pipes as per IS : 1239 (Part - I). with all necessary accessories, specials viz. socket, bend, tee, union, cross, elbo, nipple, long screw, reducing socket, reducing tee, short piece etc. fitted with holder bats clamps, including cutting pipes, making threads,fitting, fixing etc. complete in all respect including cost of all necessary fittings as required, jointing materials and two coats of painting with approved paint in any position above ground. (Payment will be made on the centre line measurements of total pipe line including all specials. No separate payment will be made for accesories, specials. Payment for painting will be made seperately) PWD Schedule 2017(volume II)Page-12/lt.no-19 I								
	15 mm dia					58	METER	101.00	5858.00
	20 mm dia					36	METER	129.00	4644.00
	25 mm dia					24	METER	177.00	4248.00
11	Supplying, fitting and fixing self closing C.P.water tap of approved brand and make - 15 mm dia. According to PWD Schedule 2017(volume II)Page-10/lt.no-15GC					6	NOS	273.00	1638.00
12	Earth work in excavation of foundation trenches or drains, in all sorts of soil (including mixed soil but excluding laterite or sandstone) including removing, spreading or stacking the spoils within a lead of 75m. as directed. The item includes necessary trimming the sides of trenches, levelling, dressing and ramming the bottom, bailing out water as required complete. (a) Depth of excavation not exceeding 1,500 mm. According to PWD Schedule, 2017Page-1/lt. no-2(a)								
	foundation		2	6.000	0.250	0.300	0.900		
			TOTAL				0.900	% Cum	11927.00
13	Filling in foundation or plinth by silver sand in layers not exceeding 150 mm as directed and consolidating the same by thorough saturation with water, ramming complete including the cost of supply of sand. (payment to be made on measurement of finished quantity). According to PWD Schedule								
			2	1.500	1.500	0.100	0.450		
			2	6.000	0.250	0.075	0.225		
			TOTAL				0.675	% Cum	37521.00

14	Single Brick Flat Soling of picked jhama bricks including ramming and dressing bed to proper level and filling joints with local sand. According to PWD Schedule 2017 Page-14/lt. no-1								
		2	2.000	1.500		6.000			
		TOTAL				6.000	m ²	293.00	1758.00
15	Ordinary Cement concrete (mix 1:2:4) with graded stone chips (20 mm nominal size) excluding shuttering and reinforcement, if any, in ground floor as per relevant IS codes. According to PWD Schedule 2017 Page-24/lt. No-4(a)								
		2	6.000	0.150	0.075	0.135			
		2	1.500	1.500	0.075	0.338			
		TOTAL				0.473	m ³	4218.00	1995.11
16	Brick work with 1st class bricks in cement mortar (1:6) According to PWD Schedule, 2017 Page-15/lt. No-8								
	A) In Foundation & Plinth.... Page-15/lt. No-8(a)								
	I) OUTER WALL	2	6.00	0.250	0.250	0.750			
		TOTAL				0.750	m ³	4695.00	3521.25
17	Plaster (to wall, floor, ceiling etc.) with sand and cement mortar including rounding off or chamfering corners as directed and raking out joints including throating, nosing and drip course, scaffolding/staging where necessary (Ground floor). [Excluding cost of chipping over concrete surface] with 1:6 cement mortar, 20mm thick plaster. According to PWD Schedule 2017 Page-189/lt. no -2(i)b								
		2	6.00		0.375	4.500			
		2	1.500		1.500	4.500			
		TOTAL				9.000	m ²	153.000	1377.00

18	Neat cement punning about 1.5mm thick in wall,dado>window sill,floor etc. NOTE:Cement 0.152 cu.m per100 sq.m. According to PWD Schedule 2017 Page-192/It.no-15				
		TOTAL	9.000	m²	34.00
(A) CIVIL COST					76476.61
(B) ELECTRIFICATION COST FOR CONNECTION *					3823.83
(1) Sub-total Cost (A+B)					80300.44
(2) 18% GST, as applicable on sl no 1					14454.08
(3) Cost of civil works excluding labour welfare cess sl no. (1+2)					94754.52
(4) Labour welfare cess @1% on sl no 3					947.55
(5) Contingency Charge @ 3% is to be considered on Sl. No. – (3)					2842.64
(6) TOTAL AMOUNT (3+4+5)					98544.71
SAY					98545.00
(IN WORDS: NINETY EIGHT THOUSAND FIVE HUNDRED FORTY FIVE) ONLY					

* Electrification cost for repairing of 1 H.P Submersible pump has kept at around 5% of total civil cost and has been found feasible from previous experience of carried out similar nature of work.



ANUP MAHATA
(Reg.-01293) D.C E.
Khata, Bankura


Divisional Forest Officer
Panchet Division
Bishnupur




Divisional Forest Officer
Panchet Division, Bishnupur

75
150
75
75
100

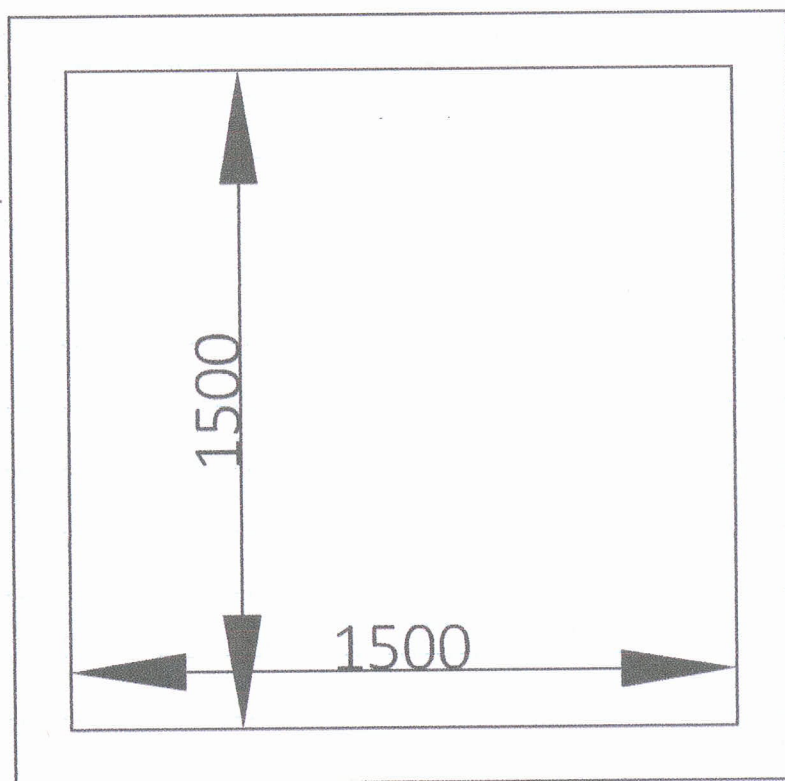

PLAN

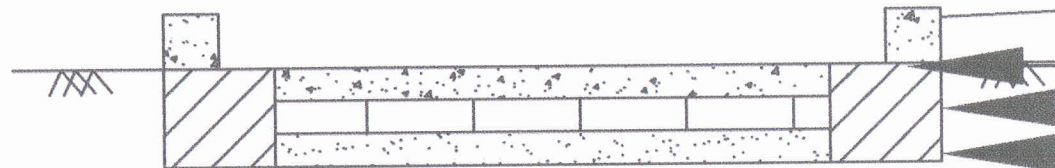

SECTION AT X-X'

150/75TH.P.C.C Railing

75TH.P.C.C

75TH.S.B.F.S.

150TH SAND FILLING

(Reg.-01293) D.C.I.
Raipur, Bishnupur



GOVERNMENT OF WEST BENGAL
DIRECTORATE OF FORESTS
OFFICE OF THE DIVISIONAL FOREST OFFICER,
PANCHET DIVISION

Satyajit Sarani, Bishnupur, Bankura
Phone & Fax No.. 03244-252189, E-mail: dfopanbis-wb@nic.in,
Website: www.bankuraforest.in

Quotation No. 48/ Repair cum Maint. of Submersible Pump of 2025-26 (JP)

Dated, Bishnupur, the: 31 / 12 / 2025

In terms of Finance Department Audit Branch Govt. of West Bengal's Memorandum No. 5400-F(Y) dated 25-06-2012 sealed quotations are invited from bonafide experienced and reliable resourceful agencies having experience in any Govt. /Semi Govt. / Govt. Under takings for providing various categories services as detailed in schedule below subject to the following conditions. Quotations should be addressed to the undersigned in sealed cover by name as well as official designation **Shri Abhijit Kar, WBFS, Divisional Forest Officer, Panchet Division, Bishnupur.**

Quotation for Repair cum Maint. of Submersible Pump at Jangalmahal Mouza, J.L. No.- 85, 01 No. (N-23°03'35" E-87°26'23") of Joypur Beat, Joypur Range under Panchet Division. (On Contract)

Copy of estimate Enclose (CDS-05)

Range	Beat	Mouza & JL No.	Quantity	Project Cost
Joypur	Joypur	Jangalmahal Mouza, J.L. No.- 85	01 No.	95,702.00

CONDITIONS

1. The Quotation should be submitted in **sealed cover**. **Quotation No., Bidder's Name & Address should be properly mentioned on the envelope. Incomplete Quotation paper or documents or envelope will be rejected.**
2. The Contractor should **quote the rates, Percentage (%) in figures as well as in words.**
3. The materials to be supplied must be approved by the concerned Authority.
4. If any defects or issues are found with the supplied materials, it will likely need to be replaced with materials that meet the necessary standards. This is to be ensured that the safety and quality of the materials being used in whatever application they are intended for meets Standard specifications as per PWD.
5. **The Contractors should submit Income-Tax, Sales Tax and Professional Tax Clearance Certificate, GST Certificate, PAN, Aadhaar & Trade License. Incomplete Quotation will be summarily rejected.**
6. Acceptance of lowest quotation is not obligatory and the undersigned reserves the right to accept or reject any or all of the quotations without assigning any reason whatsoever.
7. **The estimated rate is inclusive of all Taxes. The quotationer should quote their rate accordingly.**
8. **Bill has to be submitted with detailed break up of GST (CGST & SGST) as per the prevalent Govt. Order in this respect. All Taxes will be deducted from the gross bill as per Govt. rule.**
9. **For complying with Mahatma-Shree, the employment should first be offered to "Job Card Holders" from the fringe villagers and L1 Bidders/Contractors getting Work Order have to compulsorily submit the details as per Annexure-VI, as mandated under the scheme.**
10. Sealed Quotation will be received up to **14/01/2026 & Opened on 15/01/2026 at 11:30 A.M.**
11. The Bidders should submit PAN- Aadhaar link screen shot for authentication of PAN-Aadhaar being already linked.

Divisional Forest Officer,
Panchet Division, Bishnupur

No. 2368 (9)/02-08

Dated, Bishnupur, the: 31 / 12 / 2025

Copy forwarded for information to and wide circulation to:

1. The Chief Conservator of Forests, Central Circle, West Bengal.
2. The District Magistrate & Collector, Bankura
3. The Divisional Forest Officer, Bankura South Division, Bankura North Division & Working Plan (South) Division -II
4. The Sub- Divisional Officer, Bishnupur.
5. The Assistant Divisional Forest Officer, Panchet Division, Bishnupur.
6. The All Range Officers, Panchet Division with request to affix in the Range Notice board for wide publication.
7. Head Clerk, Panchet Division for Office Notice Board.
8. Account & Budget Section of Panchet Division.
9. Notice Board at Division Office.

Divisional Forest Officer,
Panchet Division, Bishnupur

(ANNEXURE) CDS 5

ESTIMATE FOR REPAIRING OF SUBMERSIBLE PUMP AND 2 NOS PLATFORM at MOUZA-Jangalmahal, JL. NO- 85 , BEAT-Machantala UNDER JOYPUR RANGE UNDER PANCHET DIVISION BISHNUPUR

1	Supplying & Fixing KSB make submersible pump(1 HP) including supply of stub (both end flanged) pipe necessary clamps, pressure gauge, electrical fittings including all cables (6 sq mm flat copper), star delta starter panel set, cover all complete. (As per Vetted rate by Superending Engineer, South West Electrical Circle,PWD.)	1	NOS	14500.00	14500.00
2	S & Installation 220V 1 HP composit control panel digital type (make Crompton Greavs) with angle iron frame with nut bolt asher. (As per Vetted rate by Superending Engineer, South West Electrical Circle,PWD.)	1	NOS	3367.00	3367.00
3	Supply of PVC pipes & fittings Schedule 80 (medium duty) conforming to ASTMD - 1785 and threaded to match with GI Pipes as per IS : 1239(Part - I) According to PWD Schedule 2017 (volume II) Page-13 & 14/It.no-19(III) A & B				
	80 mm dia pvc pipe	15	METRE	576.00	8640.00
	80 mm dia soket	6	NOS	180.00	1080.00
4	Supplying, fitting and fixing PVC pipes for underground work of approved make of Schedule 80 (medium duty) conforming to ASTMD -1785 and threaded to match with GI Pipes as per IS : 1239 (Part - I). with all necessary accessories, specials viz. socket, bend, tee, union, cross, elbo, nipple, longscrow, reducing socket, reducing tee, short piece etc. fitted including cost of all materials ,jointing materials, cutting pipes, making threads ,cutting trenches upto 1.5 metre below surface in all sorts of soil and refilling the same as directed complete in all respect. (Payment will be made on the centre line easurement of the total pipe line including all specials No separate Payment will be made for accessories, specials.) PVC Pipes. PWD Schedule 2017(volume II)Page-12/It.no-19 II				
	25 mm dia	64	METRE	191.00	12224.00
5	Supplying, fitting and fixing steel cutter piece upto 450 mm long with sockets. According to PWD Schedule 2017(volume II)Page-53/It.no-9	1	EACH	403.00	403.00
6	Supply of PVC pipes & fittings Schedule 80 (medium duty) conforming to ASTMD - 1785 and threaded to match with GI Pipes as per IS : 1239 (Part - I). (L) Reducing Socket (mm X mm) 150 X 80. PWD Schedule 2017 (volume II) Page-13/It.no-19(III)	1	EACH	455.00	455.00
7	Lowering of Submersible Pump Motor Set with the use of contractor's own use tools, tackles & labours as per direction of E.I.C. (As per Vetted rate by Superending Engineer, South West Electrical Circle,PWD.)	1	ITEM	2192.36	2192.36

8	S & F being Rope Clamp with Nut Bolts & Washer (As per Vetted rate by Superending Engineer, South West Electrical Circle,PWD.)				6	NOS	61.88	371.28
9	Washing and developing tube well with air compressor pump and engine for 8 (eight) hours continuous pumping per day with necessary arrangements for testing the yield in gallons per hour with 'V' notch including hire and labour charges for all tools and plants and scaffolding as required. According to PWD Schedule 2017(volume II)Page-55/It.no-20				1	DAY	7538.00	7538.00
10	Supplying, fitting and fixing PVC pipes of approved make of Schedule 80 (medium duty) conforming to ASTM D - 1785 and threaded to match with GI Pipes as per IS : 1239 (Part - I). with all necessary accessories, specials viz. socket, bend, tee, union, cross, elbo, nipple, long screw, reducing socket, reducing tee, short piece etc. fitted with holder bats clamps, including cutting pipes, making threads, fitting, fixing etc. complete in all respect including cost of all necessary fittings as required, jointing materials and two coats of painting with approved paint in any position above ground. (Payment will be made on the centre line measurements of total pipe line including all specials. No separate payment will be made for accessories, specials. Payment for painting will be made separately) PWD Schedule 2017(volume II)Page-12/It.no-19 I							
	15 mm dia				58	METER	101.00	5858.00
	20 mm dia				36	METER	129.00	4644.00
	25 mm dia				24	METER	177.00	4248.00
11	Supplying, fitting and fixing self closing C.P. water tap of approved brand and make - 15 mm dia. According to PWD Schedule 2017(volume II)Page-10/It.no-15GC				6	NOS	273.00	1638.00
12	Earth work in excavation of foundation trenches or drains, in all sorts of soil (including mixed soil but excluding laterite or sandstone) including removing, spreading or stacking the spoils within a lead of 75m. as directed. The item includes necessary trimming the sides of trenches, levelling, dressing and ramming the bottom, bailing out water as required complete. (a) Depth of excavation not exceeding 1,500 mm. According to PWD Schedule, 2017Page-1/It. no-2(a)							
	foundation	2	6.000	0.250	0.300	0.900		
	TOTAL				0.900	% Cum	11927.00	107.34
13	Filling in foundation or plinth by silver sand in layers not exceeding 150 mm as directed and consolidating the same by thorough saturation with water, ramming complete including the cost of supply of sand. (payment to be made on measurement of finished quantity). According to PWD Schedule							
		2	1.500	1.500	0.100	0.450		
		2	6.000	0.250	0.075	0.225		
	TOTAL				0.675	% Cum	37521.00	253.27


14	Single Brick Flat Soling of picked jhama bricks including ramming and dressing bed to proper level and filling joints with local sand. According to PWD Schedule 2017 Page-14/lt. no-1								
		2	2.000	1.500		6.000			
		TOTAL				6.000	m ²	293.00	1758.00
15	Ordinary Cement concrete (mix 1:2:4) with graded stone chips (20 mm nominal size) excluding shuttering and reinforcement,if any, in ground floor as per relevant IS codes. According to PWD Schedule 2017 Page-24/lt. No-4(a)								
		2	6.000	0.150	0.075	0.135			
		2	1.500	1.500	0.075	0.338			
		TOTAL				0.473	m ³	4218.00	1995.11
16	Brick work with 1st class bricks in cement mortar (1:6) According to PWD Schedule, 2017 Page-15/lt. No-8								
	A) In Foundation & Plinth.... Page-15/lt. No-8(a)								
	I) OUTER WALL	2	6.00	0.250	0.250	0.750			
		TOTAL				0.750	m ³	4695.00	3521.25
17	Plaster (to wall, floor, ceiling etc.) with sand and cement mortar including rounding off or chamfering corners as directed and raking out joints including throating, nosing and drip course, scaffolding/staging where necessary (Ground floor).[Excluding cost of chipping over concrete surface]with 1:6 cement mortar,20mm thick plaster. According to PWD Schedule 2017 Page-189/lt.no -2(i)b								
		2	6.00		0.375	4.500			
		2	1.500		1.500	4.500			
		TOTAL				9.000	m ²	153.000	1377.00

18	Neat cement punning about 1.5mm thick in wall,dado>window sill,floor etc. NOTE:Cement 0.152 cu.m per100 sq.m. According to PWD Schedule 2017 Page-192/lt.no-15				
		TOTAL	9.000	m²	34.00
(A) CIVIL COST					76476.61
(B) ELECTRIFICATION COST FOR CONNECTION *					3823.83
(1) Sub-total Cost (A+B)					80300.44
(2) 18% GST, as applicable on sl no 1					14454.08
(3) Cost of civil works excluding labour welfare cess sl no. (1+2)					94754.52
(4) Labour welfare cess @1% on sl no 3					947.55
(5) Contingency Charge @ 3% is to be considered on Sl. No. – (3)					2842.64
(6) TOTAL AMOUNT (3+4+5)					98544.71
SAY					98545.00
(IN WORDS: NINETY EIGHT THOUSAND FIVE HUNDRED FORTY FIVE) ONLY					

* Electrification cost for repairing of 1 H.P Submersible pump has kept at around 5% of total civil cost and has been found feasible from previous experience of carried out similar nature of work.


ANUP MAHATA
 (Reg.-01293) D.C E.
 Khatra, Bankura


 Divisional Forest Officer
 Panchet Division
 Bishnupur

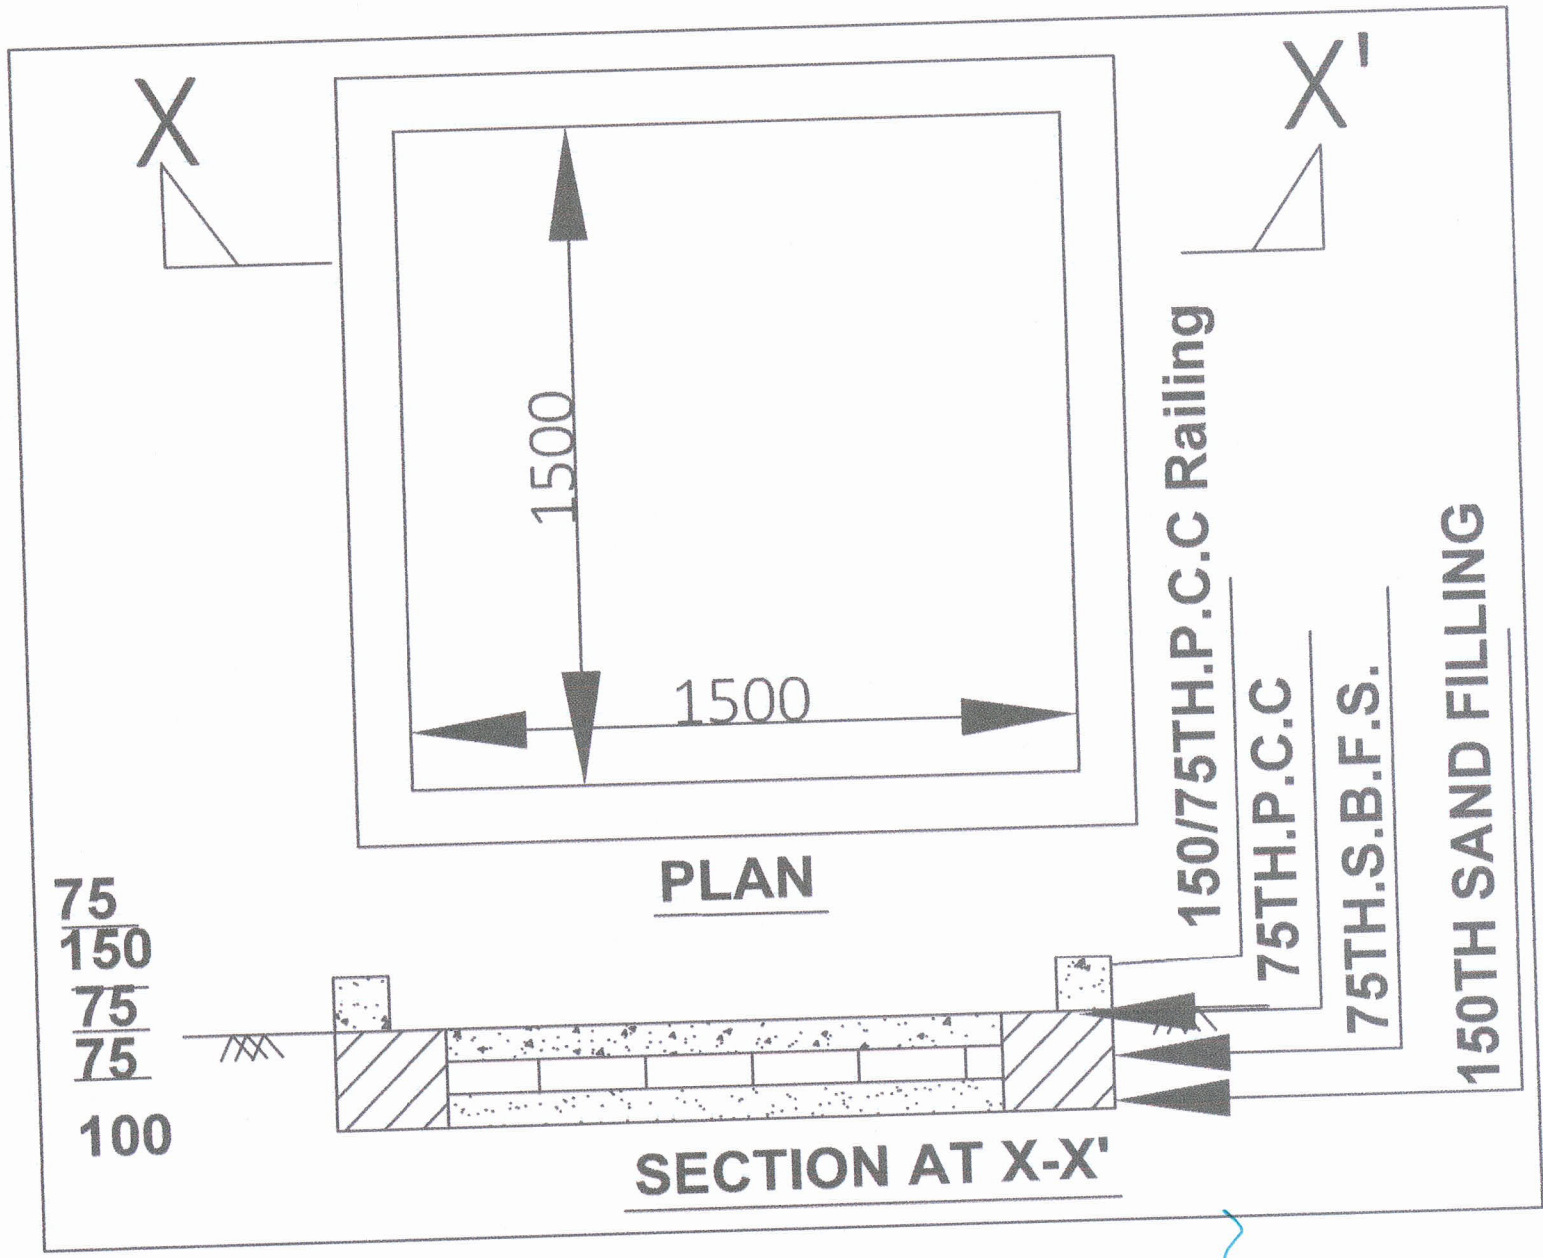

DR. K. K. SINGH
(Reg.-01293) D.C.E.
Khatra, Bankura

[Handwritten signature]

Divisional Forest Officer
Panchet Division, Bishnupur



GOVERNMENT OF WEST BENGAL
DIRECTORATE OF FORESTS
OFFICE OF THE DIVISIONAL FOREST OFFICER,
PANCHET DIVISION

Satyajit Sarani, Bishnupur, Bankura
Phone & Fax No.. 03244-252189, E-mail: dfopanbis-wb@nic.in,
Website: www.bankuraforest.in

Quotation No. 49/ Repair cum Maint. of Submersible Pump of 2025-26(TD)

Dated, Bishnupur, the: 31 / 12 / 2025

In terms of Finance Department Audit Branch Govt. of West Bengal's Memorandum No. 5400-F(Y) dated 25-06-2012 sealed quotations are invited from bonafide experienced and reliable resourceful agencies having experience in any Govt. /Semi Govt. / Govt. Under takings for providing various categories services as detailed in schedule below subject to the following conditions. Quotations should be addressed to the undersigned in sealed cover by name as well as official designation **Shri Abhijit Kar, WBFS, Divisional Forest Officer, Panchet Division, Bishnupur.**

Quotation for Repair cum Maint. of Submersible Pump at Chenchuria Mouza, J.L. No.- 70, 01 No. (N- 23° 5'46.65" E- 87° 6'27.54") of Taldangra Beat, Taldangra Range under Panchet Division. (On Contract)

Copy of estimate Enclose (CDS-07)

Range	Beat	Mouza	Quantity	Project Cost
Taldangra	Taldangra	Chenchuria Mouza, J.L. No.- 70	01 No.	95,702.00

CONDITIONS

1. The Quotation should be submitted in **sealed cover**. **Quotation No., Bidder's Name & Address should be properly mentioned on the envelope. Incomplete Quotation paper or documents or envelope will be rejected.**
2. The Contractor should **quote the rates, Percentage (%) in figures as well as in words.**
3. The materials to be supplied must be approved by the concerned Authority.
4. If any defects or issues are found with the supplied materials, it will likely need to be replaced with materials that meet the necessary standards. This is to be ensured that the safety and quality of the materials being used in whatever application they are intended for meets Standard specifications as per PWD.
5. **The Contractors should submit Income-Tax, Sales Tax and Professional Tax Clearance Certificate, GST Certificate, PAN, Aadhaar & Trade License. Incomplete Quotation will be summarily rejected.**
6. Acceptance of lowest quotation is not obligatory and the undersigned reserves the right to accept or reject any or all of the quotations without assigning any reason whatsoever.
7. **The estimated rate is inclusive of all Taxes. The quotationer should quote their rate accordingly.**
8. **Bill has to be submitted with detailed break up of GST (CGST & SGST) as per the prevalent Govt. Order in this respect. All Taxes will be deducted from the gross bill as per Govt. rule.**
9. **For complying with Mahatma-Shree, the employment should first be offered to "Job Card Holders" from the fringe villagers and L1 Bidders/Contractors getting Work Order have to compulsorily submit the details as per Annexure-VI, as mandated under the scheme.**
10. Sealed Quotation will be received up to **14/01/2026 & Opened on 15/01/2026 at 11:30 A.M.**
11. The Bidders should submit PAN- Aadhaar link screen shot for authentication of PAN-Aadhaar being already linked.

Divisional Forest Officer,
Panchet Division, Bishnupur

No. 2369 (9)/02-08

Dated, Bishnupur, the: 31 / 12 / 2025

Copy forwarded for information to and wide circulation to:

1. The Chief Conservator of Forests, Central Circle, West Bengal.
2. The District Magistrate & Collector, Bankura
3. The Divisional Forest Officer, Bankura South Division, Bankura North Division & Working Plan (South) Division -II
4. The Sub- Divisional Officer, Bishnupur.
5. The Assistant Divisional Forest Officer, Panchet Division, Bishnupur.
6. The All Range Officers, Panchet Division with request to affix in the Range Notice board for wide publication.
7. Head Clerk, Panchet Division for Office Notice Board.
8. Account & Budget Section of Panchet Division.
9. Notice Board at Division Office.

Divisional Forest Officer,
Panchet Division, Bishnupur

(ANNEXURE) CDS 7

**ESTIMATE FOR REPAIRING OF SUBMERSIBLE PUMP AND 2 NOS PLATFORM at MOUZA-Chenchuria ,
JL. NO-70 , BEAT-Taldangra UNDER -Taldangra RANGE UNDER PANCHET DIVISION BISHNUPUR**

1	Supplying & Fixing KSB make submersible pump(1 HP) including supply of stub (both end flanged) pipe necessary clamps, pressure gauge, electrical fittings including all cables (6 sq mm flat copper), star delta starter panel set, cover all complete. (As per Vetted rate by Superending Engineer, South West Electrical Circle,PWD.)	1	NOS	14500.00	14500.00
2	S & Installation 220V 1 HP composite control panel digital type (make Crompton Greaves) with angle iron frame with nut bolt asher. (As per Vetted rate by Superending Engineer, South West Electrical Circle,PWD.)	1	NOS	3367.00	3367.00
3	Supply of PVC pipes & fittings Schedule 80 (medium duty) conforming to ASTM D - 1785 and threaded to match with GI Pipes as per IS : 1239(Part - I) According to PWD Schedule 2017 (volume II) Page-13 & 14/It.no-19(III) A & B				
	80 mm dia pvc pipe	15	METRE	576.00	8640.00
	80 mm dia socket	6	NOS	180.00	1080.00
4	Supplying, fitting and fixing PVC pipes for underground work of approved make of Schedule 80 (medium duty) conforming to ASTM D -1785 and threaded to match with GI Pipes as per IS : 1239 (Part - I). with all necessary accessories, specials viz. socket, bend, tee, union, cross, elbow, nipple, long screw, reducing socket, reducing tee, short piece etc. fitted including cost of all materials ,jointing materials, cutting pipes, making threads ,cutting trenches upto 1.5 metre below surface in all sorts of soil and refilling the same as directed complete in all respect. (Payment will be made on the centre line measurement of the total pipe line including all specials No separate Payment will be made for accessories, specials.) PVC Pipes. PWD Schedule 2017(volume II)Page-12/It.no-19 II				
	25 mm dia	64	METRE	191.00	12224.00
5	Supplying, fitting and fixing steel cutter piece upto 450 mm long with sockets. According to PWD Schedule 2017(volume II)Page-53/It.no-9	1	EACH	403.00	403.00
6	Supply of PVC pipes & fittings Schedule 80 (medium duty) conforming to ASTM D - 1785 and threaded to match with GI Pipes as per IS : 1239 (Part - I). (L) Reducing Socket (mm X mm) 150 X 80. PWD Schedule 2017 (volume II) Page-13/It.no-19(III)	1	EACH	455.00	455.00

7	Lowering of Submersible Pump Motor Set with the use of contractor's own use tools, tackles & labours as per direction of E.I.C. (As per Vetted rate by Superending Engineer, South West Electrical Circle,PWD.)					1	ITEM	2192.36	2192.36
8	S & F being Rope Clamp with Nut Bolts & Washer (As per Vetted rate by Superending Engineer, South West Electrical Circle,PWD.)					6	NOS	61.88	371.28
9	Washing and developing tube well with air compressor pump and engine for 8 (eight) hours continuous pumping per day with necessary arrangements for testing the yield in gallons per hour with 'V' notch including hire and labour charges for all tools and plants and scaffolding as required. According to PWD Schedule 2017(volume II)Page-55/It.no-20					1	DAY	7538.00	7538.00
10	Supplying, fitting and fixing PVC pipes of approved make of Schedule 80 (medium duty) conforming to ASTM D - 1785 and threaded to match with GI Pipes as per IS : 1239 (Part - I). with all necessary accessories, specials viz. socket, bend, tee, union, cross, elbo, nipple, long screw, reducing socket, reducing tee, short piece etc. fitted with holder bats clamps, including cutting pipes, making threads, fitting, fixing etc. complete in all respect including cost of all necessary fittings as required, jointing materials and two coats of painting with approved paint in any position above ground. (Payment will be made on the centre line measurements of total pipe line including all specials. No separate payment will be made for accessories, specials. Payment for painting will be made separately) PWD Schedule 2017(volume II)Page-12/It.no-19 I								
	15 mm dia					58	METER	101.00	5858.00
	20 mm dia					36	METER	129.00	4644.00
	25 mm dia					24	METER	177.00	4248.00
11	Supplying, fitting and fixing self closing C.P. water tap of approved brand and make - 15 mm dia. According to PWD Schedule 2017(volume II)Page-10/It.no-15GC					6	NOS	273.00	1638.00
12	Earth work in excavation of foundation trenches or drains, in all sorts of soil (including mixed soil but excluding laterite or sandstone) including removing, spreading or stacking the spoils within a lead of 75m. as directed. The item includes necessary trimming the sides of trenches, levelling, dressing and ramming the bottom, bailing out water as required complete. (a) Depth of excavation not exceeding 1,500 mm. According to PWD Schedule, 2017Page-1/It. no-2(a)								
	foundation	2	6.000	0.250	0.300	0.900			
	TOTAL					0.900	% Cum	11927.00	107.34

13	Filling in foundation or plinth by silver sand in layers not exceeding 150 mm as directed and consolidating the same by thorough saturation with water, ramming complete including the cost of supply of sand. (payment to be made on measurement of finished quantity).								
	According to PWD Schedule								
		2	1.500	1.500	0.100	0.450			
		2	6.000	0.250	0.075	0.225			
		TOTAL				0.675	% Cum	37521.00	253.27
14	Single Brick Flat Soling of picked jhama bricks including ramming and dressing bed to proper level and filling joints with local sand.								
	According to PWD Schedule 2017 Page-14/lt. no-1								
		2	2.000	1.500		6.000			
		TOTAL				6.000	m²	293.00	1758.00
15	Ordinary Cement concrete (mix 1:2:4) with graded stone chips (20 mm nominal size) excluding shuttering and reinforcement, if any, in ground floor as per relevant IS codes.								
	According to PWD Schedule 2017 Page-24/lt. No-4(a)								
		2	6.000	0.150	0.075	0.135			
		2	1.500	1.500	0.075	0.338			
		TOTAL				0.473	m³	4218.00	1995.11
16	Brick work with 1st class bricks in cement mortar (1:6)								
	According to PWD Schedule, 2017 Page-15/lt. No-8								
	A) In Foundation & Plinth....Page-15/lt. No-8(a)								
	I) OUTER WALL	2	6.00	0.250	0.250	0.750			
		TOTAL				0.750	m³	4695.00	3521.25
17	Plaster (to wall, floor, ceiling etc.) with sand and cement mortar including rounding off or chamfering corners as directed and raking out joints including throating, nosing and drip course, scaffolding/staging where necessary (Ground floor).[Excluding cost of chipping over concrete surface]with 1:6 cement mortar,20mm thick plaster.								
	According to PWD Schedule 2017 Page-189/lt.no -2(i)b								
		2	6.00		0.375	4.500			
		2	1.500		1.500	4.500			
		TOTAL				9.000	m²	153.000	1377.00


18	Neat cement punning about 1.5mm thick in wall,dado>window sill,floor etc. NOTE:Cement 0.152 cu.m per100 sq.m. According to PWD Schedule 2017 Page-192/lt.no-15				
		TOTAL	9.000	m ²	34.00
(A) CIVIL COST					76476.61
(B) ELECTRIFICATION COST FOR CONNECTION *					3823.83
(1) Sub-total Cost (A+B)					80300.44
(2) 18% GST, as applicable on sl no 1					14454.08
(3) Cost of civil works excluding labour welfare cess sl no. (1+2)					94754.52
(4) Labour welfare cess @1% on sl no 3					947.55
(5) Contingency Charge @ 3% is to be considered on Sl. No. – (3)					2842.64
(6) TOTAL AMOUNT (3+4+5)					98544.71
SAY					98545.00
(IN WORDS: NINETY EIGHT THOUSAND FIVE HUNDRED FORTY FIVE) ONLY					

* Electrification cost for repairing of 1 H.P Submersible pump has kept at around 5% of total civil cost and has been found feasible from previous experience of carried out similar nature of work.

ANUP MAHATA
(Reg.-01293) D.C.E.
Khatra, Bankura


Divisional Forest Officer
Panchet Division
Bishnupur

[Signature]
 Divisional Forest Officer
 Panchet Division, Bishnupur

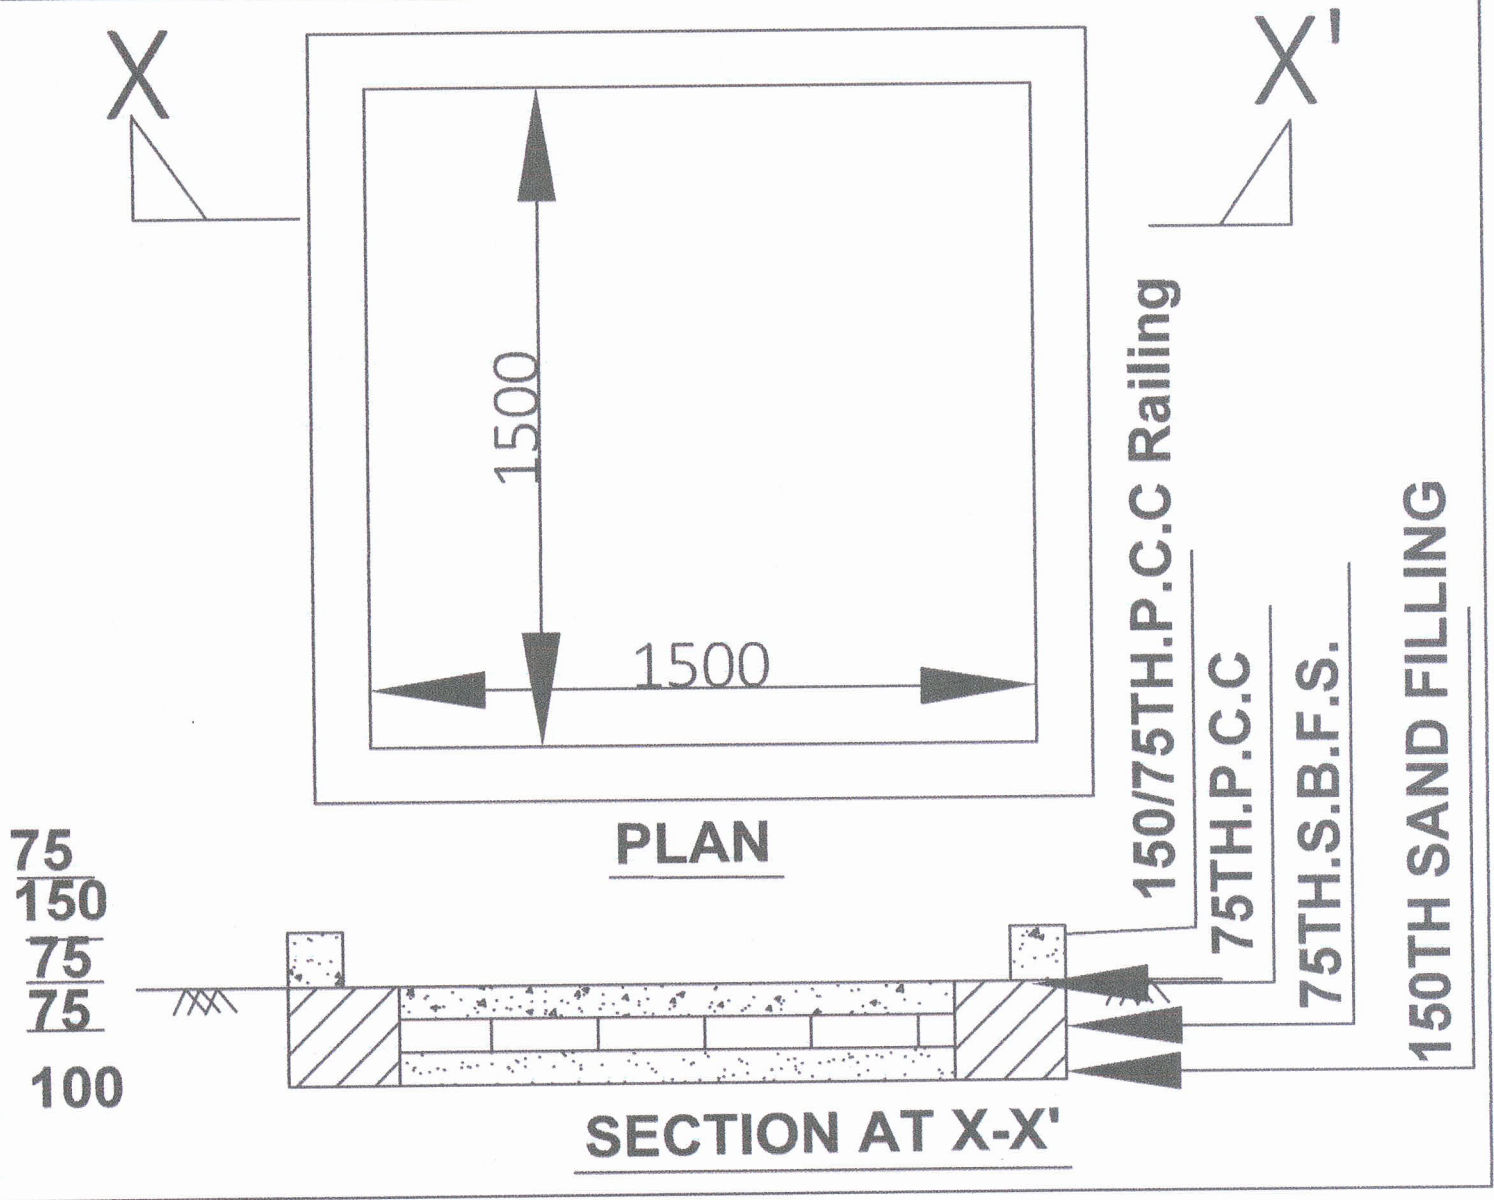

[Signature]
 (Reg.-01293) D.C.E.
 Patna, Barikura



GOVERNMENT OF WEST BENGAL
DIRECTORATE OF FORESTS
OFFICE OF THE DIVISIONAL FOREST OFFICER,
PANCHET DIVISION

Satyajit Sarani, Bishnupur, Bankura
Phone & Fax No.. 03244-252189, E-mail: dfopanbis-wb@nic.in,
Website: www.bankuraforest.in

Quotation No. 50/ Repair cum Maint. of Submersible Pump of 2025-26(TD)

Dated, Bishnupur, the: 31 / 12 / 2025

In terms of Finance Department Audit Branch Govt. of West Bengal's Memorandum No. 5400-F(Y) dated 25-06-2012 sealed quotations are invited from bonafide experienced and reliable resourceful agencies having experience in any Govt. /Semi Govt. / Govt. Under takings for providing various categories services as detailed in schedule below subject to the following conditions. Quotations should be addressed to the undersigned in sealed cover by name as well as official designation **Shri Abhijit Kar, WBFS, Divisional Forest Officer, Panchet Division, Bishnupur.**

Quotation for Repair cum Maint. of Submersible Pump at Chenchuria Mouza, J.L. No.- 70, 01 No. (N-23° 1'35.50" E- 87° 5'59.67") of Taldangra Beat, Taldangra Range under Panchet Division. (On Contract)

Copy of estimate Enclose (CDS-08)

Range	Beat	Mouza	Quantity	Project Cost
Taldangra	Taldangra	Chenchuria Mouza, J.L. No.- 70	01 No.	95,702.00

CONDITIONS

1. The Quotation should be submitted in **sealed cover**. **Quotation No., Bidder's Name & Address should be properly mentioned on the envelope. Incomplete Quotation paper or documents or envelope will be rejected.**
2. The Contractor should **quote the rates, Percentage (%) in figures as well as in words.**
3. The materials to be supplied must be approved by the concerned Authority.
4. If any defects or issues are found with the supplied materials, it will likely need to be replaced with materials that meet the necessary standards. This is to be ensured that the safety and quality of the materials being used in whatever application they are intended for meets Standard specifications as per PWD.
5. **The Contractors should submit Income-Tax, Sales Tax and Professional Tax Clearance Certificate, GST Certificate, PAN, Aadhaar & Trade License. Incomplete Quotation will be summarily rejected.**
6. Acceptance of lowest quotation is not obligatory and the undersigned reserves the right to accept or reject any or all of the quotations without assigning any reason whatsoever.
7. **The estimated rate is inclusive of all Taxes. The quotationer should quote their rate accordingly.**
8. **Bill has to be submitted with detailed break up of GST (CGST & SGST) as per the prevalent Govt. Order in this respect. All Taxes will be deducted from the gross bill as per Govt. rule.**
9. **For complying with Mahatma-Shree, the employment should first be offered to "Job Card Holders" from the fringe villagers and L1 Bidders/Contractors getting Work Order have to compulsorily submit the details as per Annexure-VI, as mandated under the scheme.**
10. Sealed Quotation will be received up to **14/01/2026 & Opened on 15/01/2026 at 11:30 A.M.**
11. The Bidders should submit PAN- Aadhaar link screen shot for authentication of PAN-Aadhaar being already linked.

Divisional Forest Officer,
Panchet Division, Bishnupur

No. 2370 (9)/02-08

Dated, Bishnupur, the: 31 / 12 / 2025

Copy forwarded for information to and wide circulation to:

1. The Chief Conservator of Forests, Central Circle, West Bengal.
2. The District Magistrate & Collector, Bankura
3. The Divisional Forest Officer, Bankura South Division, Bankura North Division & Working Plan (South) Division -II
4. The Sub- Divisional Officer, Bishnupur.
5. The Assistant Divisional Forest Officer, Panchet Division, Bishnupur.
6. The All Range Officers, Panchet Division with request to affix in the Range Notice board for wide publication.
7. Head Clerk, Panchet Division for Office Notice Board.
8. Account & Budget Section of Panchet Division.
9. Notice Board at Division Office.

Divisional Forest Officer,
Panchet Division, Bishnupur

(ANNEXURE) CDS 8

**ESTIMATE FOR REPAIRING OF SUBMERSIBLE PUMP AND 2 NOS PLATFORM at MOUZA-Chenchuria ,
JL. NO-70 , BEAT-Taldangra UNDER -Taldangra RANGE UNDER PANCHET DIVISION BISHNUPUR**

1	Supplying & Fixing KSB make submersible pump(1 HP) including supply of stub (both end flanged) pipe necessary clamps, pressure gauge, electrical fittings including all cables (6 sq mm flat copper), star delta starter panel set, cover all complete. (As per Vetted rate by Superending Engineer, South West Electrical Circle,PWD.)	1	NOS	14500.00	14500.00
2	S & Installation 220V 1 HP composite control panel digital type (make Crompton Greaves) with angle iron frame with nut bolt asher. (As per Vetted rate by Superending Engineer, South West Electrical Circle,PWD.)	1	NOS	3367.00	3367.00
3	Supply of PVC pipes & fittings Schedule 80 (medium duty) conforming to ASTM D - 1785 and threaded to match with GI Pipes as per IS : 1239(Part - I) According to PWD Schedule 2017 (volume II) Page-13 & 14/It.no-19(III) A & B				
	80 mm dia pvc pipe	15	METRE	576.00	8640.00
	80 mm dia socket	6	NOS	180.00	1080.00
4	Supplying, fitting and fixing PVC pipes for underground work of approved make of Schedule 80 (medium duty) conforming to ASTM D -1785 and threaded to match with GI Pipes as per IS : 1239 (Part - I). with all necessary accessories, specials viz. socket, bend, tee, union, cross, elbow, nipple, long screw, reducing socket, reducing tee, short piece etc. fitted including cost of all materials ,jointing materials, cutting pipes, making threads ,cutting trenches upto 1.5 metre below surface in all sorts of soil and refilling the same as directed complete in all respect. (Payment will be made on the centre line measurement of the total pipe line including all specials No separate Payment will be made for accessories, specials.) PVC Pipes. PWD Schedule 2017(volume II)Page-12/It.no-19 II				
	25 mm dia	64	METRE	191.00	12224.00
5	Supplying, fitting and fixing steel cutter piece upto 450 mm long with sockets. According to PWD Schedule 2017(volume II)Page-53/It.no-9	1	EACH	403.00	403.00
6	Supply of PVC pipes & fittings Schedule 80 (medium duty) conforming to ASTM D - 1785 and threaded to match with GI Pipes as per IS : 1239 (Part - I). (L) Reducing Socket (mm X mm) 150 X 80. PWD Schedule 2017 (volume II) Page-13/It.no-19(III)	1	EACH	455.00	455.00

7	Lowering of Submersible Pump Motor Set with the use of contractor's own use tools, tackles & labours as per direction of E.I.C. (As per Vetted rate by Superending Engineer, South West Electrical Circle,PWD.)				1	ITEM	2192.36	2192.36
8	S & F being Rope Clamp with Nut Bolts & Washer (As per Vetted rate by Superending Engineer, South West Electrical Circle,PWD.)				6	NOS	61.88	371.28
9	Washing and developing tube well with air compressor pump and engine for 8 (eight) hours continuous pumping per day with necessary arrangements for testing the yield in gallons per hour with 'V' notch including hire and labour charges for all tools and plants and scaffolding as required. According to PWD Schedule 2017(volume II)Page-55/lt.no-20				1	DAY	7538.00	7538.00
10	Supplying, fitting and fixing PVC pipes of approved make of Schedule 80 (medium duty) conforming to ASTM D - 1785 and threaded to match with GI Pipes as per IS : 1239 (Part - I). with all necessary accessories, specials viz. socket, bend, tee, union, cross, elbo, nipple, long screw, reducing socket, reducing tee, short piece etc. fitted with holder bats clamps, including cutting pipes, making threads, fitting, fixing etc. complete in all respect including cost of all necessary fittings as required, jointing materials and two coats of painting with approved paint in any position above ground. (Payment will be made on the centre line measurements of total pipe line including all specials. No separate payment will be made for accessories, specials. Payment for painting will be made separately) PWD Schedule 2017(volume II)Page-12/lt.no-19 I							
	15 mm dia				58	METER	101.00	5858.00
	20 mm dia				36	METER	129.00	4644.00
	25 mm dia				24	METER	177.00	4248.00
11	Supplying, fitting and fixing self closing C.P. water tap of approved brand and make - 15 mm dia. According to PWD Schedule 2017(volume II)Page-10/lt.no-15GC				6	NOS	273.00	1638.00
12	Earth work in excavation of foundation trenches or drains, in all sorts of soil (including mixed soil but excluding laterite or sandstone) including removing, spreading or stacking the spoils within a lead of 75m. as directed. The item includes necessary trimming the sides of trenches, levelling, dressing and ramming the bottom, bailing out water as required complete. (a) Depth of excavation not exceeding 1,500 mm. According to PWD Schedule, 2017Page-1/lt. no-2(a)							
	foundation	2	6.000	0.250	0.300	0.900		
	TOTAL				0.900	% Cum	11927.00	107.34

13	Filling in foundation or plinth by silver sand in layers not exceeding 150 mm as directed and consolidating the same by thorough saturation with water, ramming complete including the cost of supply of sand. (payment to be made on measurement of finished quantity).								
	According to PWD Schedule								
		2	1.500	1.500	0.100	0.450			
		2	6.000	0.250	0.075	0.225			
	TOTAL					0.675	% Cum	37521.00	253.27
14	Single Brick Flat Soling of picked jhama bricks including ramming and dressing bed to proper level and filling joints with local sand. According to PWD Schedule 2017 Page-14/lt. no-1								
		2	2.000	1.500		6.000			
	TOTAL					6.000	m ²	293.00	1758.00
15	Ordinary Cement concrete (mix 1:2:4) with graded stone chips (20 mm nominal size) excluding shuttering and reinforcement, if any, in ground floor as per relevant IS codes. According to PWD Schedule 2017 Page-24/lt. No-4(a)								
		2	6.000	0.150	0.075	0.135			
		2	1.500	1.500	0.075	0.338			
	TOTAL					0.473	m ³	4218.00	1995.11
16	Brick work with 1st class bricks in cement mortar (1:6) According to PWD Schedule, 2017 Page-15/lt. No-8								
	A) In Foundation & Plinth.... Page-15/lt. No-8(a)								
	I) OUTER WALL	2	6.00	0.250	0.250	0.750			
	TOTAL					0.750	m ³	4695.00	3521.25
17	Plaster (to wall, floor, ceiling etc.) with sand and cement mortar including rounding off or chamfering corners as directed and raking out joints including throating, nosing and drip course, scaffolding/staging where necessary (Ground floor). [Excluding cost of chipping over concrete surface] with 1:6 cement mortar, 20mm thick plaster. According to PWD Schedule 2017 Page-189/lt. no -2(i)b								
		2	6.00		0.375	4.500			
		2	1.500		1.500	4.500			
	TOTAL					9.000	m ²	153.000	1377.00

18	Neat cement punning about 1.5mm thick in wall,dado>window sill,floor etc. NOTE:Cement 0.152 cu.m per100 sq.m. According to PWD Schedule 2017 Page-192/lt.no-15				
		TOTAL	9.000	m²	34.00
(A) CIVIL COST					76476.61
(B) ELECTRIFICATION COST FOR CONNECTION *					3823.83
(1) Sub-total Cost (A+B)					80300.44
(2) 18% GST, as applicable on sl no 1					14454.08
(3) Cost of civil works excluding labour welfare cess sl no. (1+2)					94754.52
(4) Labour welfare cess @1% on sl no 3					947.55
(5) Contingency Charge @ 3% is to be considered on Sl. No. – (3)					2842.64
(6) TOTAL AMOUNT (3+4+5)					98544.71
SAY					98545.00
(IN WORDS: NINETY EIGHT THOUSAND FIVE HUNDRED FORTY FIVE) ONLY					

* Electrification cost for repairing of 1 H.P Submersible pump has kept at around 5% of total civil cost and has been found feasible from previous experience of carried out similar nature of work.


ANUP MAHATA
(Reg.-01293) D.O.E.
Khatra, Bankura


Divisional Forest Officer
Panchet Division
Bishnupur



GOVERNMENT OF WEST BENGAL
DIRECTORATE OF FORESTS
OFFICE OF THE DIVISIONAL FOREST OFFICER,
PANCHET DIVISION

Satyajit Sarani, Bishnupur, Bankura

Phone & Fax No.. 03244-252189, E-mail: dfopanbis-wb@nic.in,

Website: www.bankuraforest.in



Quotation No. 51/ Repair cum Maint. of Submersible Pump of 2025-26(OD)

Dated, Bishnupur, the: 31 / 12 / 2025

In terms of Finance Department Audit Branch Govt. of West Bengal's Memorandum No. 5400-F(Y) dated 25-06-2012 sealed quotations are invited from bonafide experienced and reliable resourceful agencies having experience in any Govt. /Semi Govt. / Govt. Under takings for providing various categories services as detailed in schedule below subject to the following conditions. Quotations should be addressed to the undersigned in sealed cover by name as well as official designation **Shri Abhijit Kar, WBFS, Divisional Forest Officer, Panchet Division, Bishnupur.**

Quotation for Repair cum Maint. of Submersible Pump at Chak Krishnasingpur Mouza, J.L. No.- 166, 01 No. (N- 23°03'20.83" E-087°10'01.87") of Chingani Beat, Onda Range under Panchet Division. (On Contract)

Copy of estimate Enclose (CDS-09)

Range	Beat	Mouza	Quantity	Project Cost
Onda	Chingani	Chak Krishnasingpur Mouza, J.L. No.- 166	01 No.	95,702.00

CONDITIONS

1. The Quotation should be submitted in **sealed cover**. **Quotation No., Bidder's Name & Address should be properly mentioned on the envelope. Incomplete Quotation paper or documents or envelope will be rejected.**
2. The Contractor should **quote the rates, Percentage (%) in figures as well as in words.**
3. The materials to be supplied must be approved by the concerned Authority.
4. If any defects or issues are found with the supplied materials, it will likely need to be replaced with materials that meet the necessary standards. This is to be ensured that the safety and quality of the materials being used in whatever application they are intended for meets Standard specifications as per PWD.
5. **The Contractors should submit Income-Tax, Sales Tax and Professional Tax Clearance Certificate, GST Certificate, PAN, Aadhaar & Trade License. Incomplete Quotation will be summarily rejected.**
6. Acceptance of lowest quotation is not obligatory and the undersigned reserves the right to accept or reject any or all of the quotations without assigning any reason whatsoever.
7. **The estimated rate is inclusive of all Taxes. The quotationer should quote their rate accordingly.**
8. **Bill has to be submitted with detailed break up of GST (CGST & SGST) as per the prevalent Govt. Order in this respect. All Taxes will be deducted from the gross bill as per Govt. rule.**
9. **For complying with Mahatma-Shree, the employment should first be offered to "Job Card Holders" from the fringe villagers and L1 Bidders/Contractors getting Work Order have to compulsorily submit the details as per Annexure-VI, as mandated under the scheme.**
10. Sealed Quotation will be received up to **14/01/2026 & Opened on 15/01/2026 at 11:30 A.M.**
11. The Bidders should submit PAN- Aadhaar link screen shot for authentication of PAN-Aadhaar being already linked.

Divisional Forest Officer,
Panchet Division, Bishnupur

No. 2371(9)/02-08

Dated, Bishnupur, the: 31 / 12 / 2025

Copy forwarded for information to and wide circulation to:

1. The Chief Conservator of Forests, Central Circle, West Bengal.
2. The District Magistrate & Collector, Bankura
3. The Divisional Forest Officer, Bankura South Division, Bankura North Division & Working Plan (South) Division -II
4. The Sub- Divisional Officer, Bishnupur.
5. The Assistant Divisional Forest Officer, Panchet Division, Bishnupur.
6. The All Range Officers, Panchet Division with request to affix in the Range Notice board for wide publication.
7. Head Clerk, Panchet Division for Office Notice Board.
8. Account & Budget Section of Panchet Division.
9. Notice Board at Division Office.

Divisional Forest Officer,
Panchet Division, Bishnupur

(ANNEXURE) CDS-9

**ESTIMATE FOR REPAIRING OF SUBMERSIBLE PUMP AND 2 NOS PLATFORM at MOUZA-Chak
Krishnasingpur, JL. NO-166 , BEAT-Chingani UNDER -ONDA RANGE UNDER PANCHET DIVISION
BISHNUPUR**

1	Supplying & Fixing KSB make submersible pump(1 HP) including supply of stub (both end flanged) pipe necessary clamps, pressure gauge, electrical fittings including all cables (6 sq mm flat copper), star delta starter panel set, cover all complete. (As per Vetted rate by Superending Engineer, South West Electrical Circle,PWD.)	1	NOS	14500.00	14500.00
2	S & Installation 220V 1 HP composite control panel digital type (make Crompton Greaves) with angle iron frame with nut bolt asher. (As per Vetted rate by Superending Engineer, South West Electrical Circle,PWD.)	1	NOS	3367.00	3367.00
3	Supply of PVC pipes & fittings Schedule 80 (medium duty) conforming to ASTM D - 1785 and threaded to match with GI Pipes as per IS : 1239(Part - I) According to PWD Schedule 2017 (volume II) Page-13 & 14/It.no-19(III) A & B				
	80 mm dia pvc pipe	15	METRE	576.00	8640.00
	80 mm dia socket	6	NOS	180.00	1080.00
4	Supplying, fitting and fixing PVC pipes for underground work of approved make of Schedule 80 (medium duty) conforming to ASTM D -1785 and threaded to match with GI Pipes as per IS : 1239 (Part - I). with all necessary accessories, specials viz. socket, bend, tee, union, cross, elbow, nipple, long screw, reducing socket, reducing tee, short piece etc. fitted including cost of all materials ,jointing materials, cutting pipes, making threads ,cutting trenches upto 1.5 metre below surface in all sorts of soil and refilling the same as directed complete in all respect. (Payment will be made on the centre line easurement of the total pipe line including all specials No separate Payment will be made for accessories, specials.) PVC Pipes. PWD Schedule 2017(volume II)Page-12/It.no-19 II				
	25 mm dia	64	METRE	191.00	12224.00
5	Supplying, fitting and fixing steel cutter piece upto 450 mm long with sockets. According to PWD Schedule 2017(volume II)Page-53/It.no-9	1	EACH	403.00	403.00
6	Supply of PVC pipes & fittings Schedule 80 (medium duty) conforming to ASTM D - 1785 and threaded to match with GI Pipes as per IS : 1239 (Part - I). (L) Reducing Socket (mm X mm) 150 X 80. PWD Schedule 2017 (volume II) Page-13/It.no-19(III)	1	EACH	455.00	455.00

7	Lowering of Submersible Pump Motor Set with the use of contractor's own use tools, tackles & labours as per direction of E.I.C. (As per Vetted rate by Superending Engineer, South West Electrical Circle,PWD.)	1	ITEM	2192.36	2192.36				
8	S & F being Rope Clamp with Nut Bolts & Washer (As per Vetted rate by Superending Engineer, South West Electrical Circle,PWD.)	6	NOS	61.88	371.28				
9	Washing and developing tube well with air compressor pump and engine for 8 (eight) hours continuous pumping per day with necessary arrangements for testing the yield in gallons per hour with 'V' notch including hire and labour charges for all tools and plants and scaffolding as required. According to PWD Schedule 2017(volume II)Page-55/lt.no-20	1	DAY	7538.00	7538.00				
10	Supplying, fitting and fixing PVC pipes of approved make of Schedule 80 (medium duty) conforming to ASTM D - 1785 and threaded to match with GI Pipes as per IS : 1239 (Part - I). with all necessary accessories, specials viz. socket, bend, tee, union, cross, elbo, nipple, long screw, reducing socket, reducing tee, short piece etc. fitted with holder bats clamps, including cutting pipes, making threads,fitting, fixing etc. complete in all respect including cost of all necessary fittings as required, jointing materials and two coats of painting with approved paint in any position above ground. (Payment will be made on the centre line measurements of total pipe line including all specials. No separate payment will be made for accesories, specials. Payment for painting will be made seperately) PWD Schedule 2017(volume II)Page-12/lt.no-19 I								
	15 mm dia	58	METER	101.00	5858.00				
	20 mm dia	36	METER	129.00	4644.00				
	25 mm dia	24	METER	177.00	4248.00				
11	Supplying, fitting and fixing self closing C.P.water tap of approved brand and make - 15 mm dia. According to PWD Schedule 2017(volume II)Page-10/lt.no-15GC	6	NOS	273.00	1638.00				
12	Earth work in excavation of foundation trenches or drains, in all sorts of soil (including mixed soil but excluding laterite or sandstone) including removing, spreading or stacking the spoils within a lead of 75m. as directed. The item includes necessary trimming the sides of trenches, levelling, dressing and ramming the bottom, bailing out water as required complete. (a) Depth of excavation not exceeding 1,500 mm. According to PWD Schedule, 2017Page-1/lt. no-2(a)								
	foundation	2	6.000	0.250	0.300	0.900			
	TOTAL			0.900	% Cum	11927.00	107.34		

13	Filling in foundation or plinth by silver sand in layers not exceeding 150 mm as directed and consolidating the same by thorough saturation with water, ramming complete including the cost of supply of sand. (payment to be made on measurement of finished quantity).								
	According to PWD Schedule								
		2	1.500	1.500	0.100	0.450			
		2	6.000	0.250	0.075	0.225			
		TOTAL				0.675	% Cum	37521.00	253.27
14	Single Brick Flat Soling of picked jhama bricks including ramming and dressing bed to proper level and filling joints with local sand.								
	According to PWD Schedule 2017 Page-14/lt. no-1								
		2	2.000	1.500		6.000			
		TOTAL				6.000	m²	293.00	1758.00
15	Ordinary Cement concrete (mix 1:2:4) with graded stone chips (20 mm nominal size) excluding shuttering and reinforcement, if any, in ground floor as per relevant IS codes.								
	According to PWD Schedule 2017 Page-24/lt. No-4(a)								
		2	6.000	0.150	0.075	0.135			
		2	1.500	1.500	0.075	0.338			
		TOTAL				0.473	m³	4218.00	1995.11
16	Brick work with 1st class bricks in cement mortar (1:6)								
	According to PWD Schedule, 2017 Page-15/lt. No-8								
	A) In Foundation & Plinth....Page-15/lt. No-8(a)								
	I) OUTER WALL	2	6.00	0.250	0.250	0.750			
		TOTAL				0.750	m³	4695.00	3521.25
17	Plaster (to wall, floor, ceiling etc.) with sand and cement mortar including rounding off or chamfering corners as directed and raking out joints including throating, nosing and drip course, scaffolding/staging where necessary (Ground floor).[Excluding cost of chipping over concrete surface]with 1:6 cement mortar,20mm thick plaster.								
	According to PWD Schedule 2017 Page-189/lt.no -2(i)b								
		2	6.00		0.375	4.500			
		2	1.500		1.500	4.500			
		TOTAL				9.000	m²	153.000	1377.00

18	Neat cement punning about 1.5mm thick in wall,dado>window sill,floor etc. NOTE:Cement 0.152 cu.m per100 sq.m. According to PWD Schedule 2017 Page-192/lt.no-15				
		TOTAL	9.000	m²	34.00
(A) CIVIL COST					76476.61
(B) ELECTRIFICATION COST FOR CONNECTION *					3823.83
(1) Sub-total Cost (A+B)					80300.44
(2) 18% GST, as applicable on sl no 1					14454.08
(3) Cost of civil works excluding labour welfare cess sl no. (1+2)					94754.52
(4) Labour welfare cess @1% on sl no 3					947.55
(5) Contingency Charge @ 3% is to be considered on Sl. No. – (3)					2842.64
(6) TOTAL AMOUNT (3+4+5)					98544.71
SAY					98545.00
(IN WORDS: NINETY EIGHT THOUSAND FIVE HUNDRED FORTY FIVE) ONLY					


* Electrification cost for repairing of 1 H.P Submersible pump has kept at around 5% of total civil cost and has been found feasible from previous experience of carried out similar nature of work.

ANUP MAHATA
(Reg.-01293) D.O.E.
Khatra, Bankura


Divisional Forest Officer
Panchet Division
Bishnupur

[Handwritten signature]

Divisional Forest Officer
Panchet Division, Bishnupur

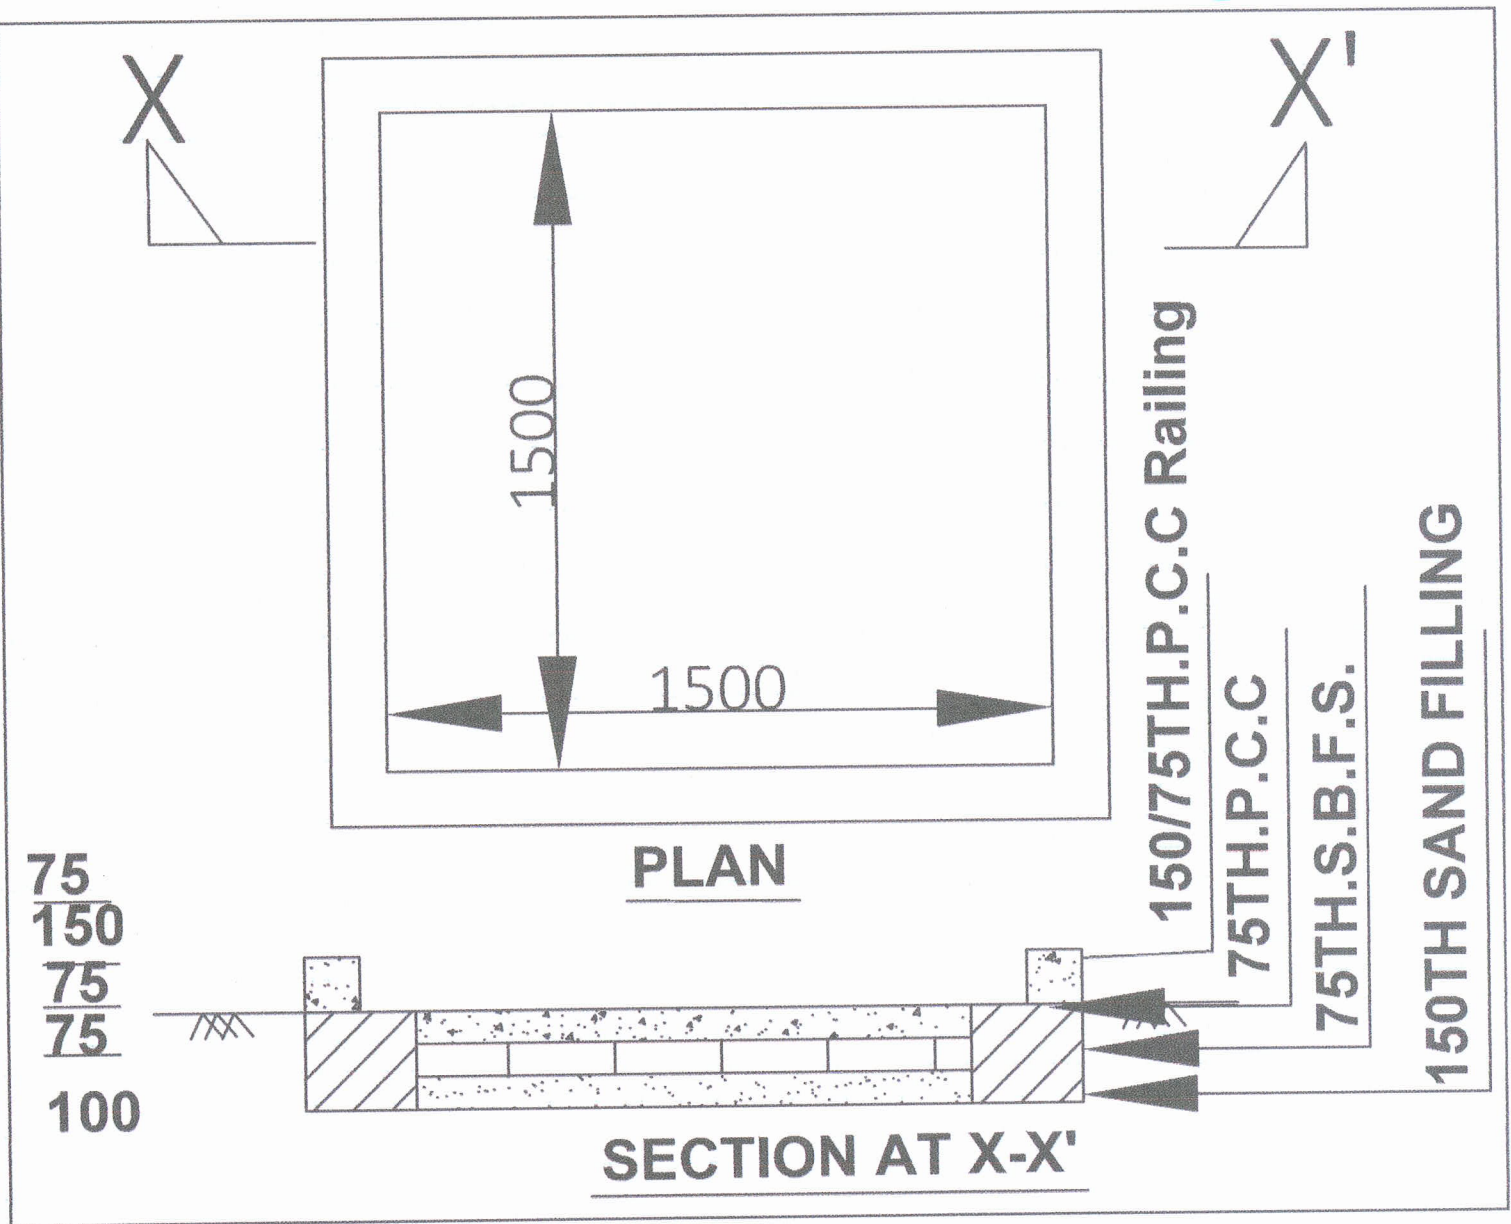

[Handwritten signature]
(Reg. 01234) D.C.H.
Patna, Bankura



GOVERNMENT OF WEST BENGAL
DIRECTORATE OF FORESTS
OFFICE OF THE DIVISIONAL FOREST OFFICER,
PANCHET DIVISION

Satyajit Sarani, Bishnupur, Bankura
Phone & Fax No.. 03244-252189, E-mail: dfopanbis-wb@nic.in,
Website: www.bankuraforest.in

Quotation No. 52/ Repair cum Maint. of Submersible Pump of 2025-26(OD)

Dated, Bishnupur, the: 31 / 12 / 2025

In terms of Finance Department Audit Branch Govt. of West Bengal's Memorandum No. 5400-F(Y) dated 25-06-2012 sealed quotations are invited from bonafide experienced and reliable resourceful agencies having experience in any Govt. /Semi Govt. / Govt. Under takings for providing various categories services as detailed in schedule below subject to the following conditions. Quotations should be addressed to the undersigned in sealed cover by name as well as official designation **Shri Abhijit Kar, WBFS, Divisional Forest Officer, Panchet Division, Bishnupur.**

Quotation for Repair cum Maint. of Submersible Pump at Rajduha Mouza, J.L. No. 158, 01 No. (N-23°04'52.12" E-087°10'29.84") of Chingani Beat, Onda Range under Panchet Division. (On Contract)

Copy of estimate Enclose (CDS-10)

Range	Beat	Mouza & J.L. No.	Quantity	Project Cost
Onda	Chingani	Rajduha Mouza, J.L. No.- 158	01 No.	95,702.00

CONDITIONS

1. The Quotation should be submitted in **sealed cover**. **Quotation No., Bidder's Name & Address should be properly mentioned on the envelope. Incomplete Quotation paper or documents or envelope will be rejected.**
2. The Contractor should **quote the rates, Percentage (%) in figures as well as in words.**
3. The materials to be supplied must be approved by the concerned Authority.
4. If any defects or issues are found with the supplied materials, it will likely need to be replaced with materials that meet the necessary standards. This is to be ensured that the safety and quality of the materials being used in whatever application they are intended for meets Standard specifications as per PWD.
5. **The Contractors should submit Income-Tax, Sales Tax and Professional Tax Clearance Certificate, GST Certificate, PAN, Aadhaar & Trade License. Incomplete Quotation will be summarily rejected.**
6. Acceptance of lowest quotation is not obligatory and the undersigned reserves the right to accept or reject any or all of the quotations without assigning any reason whatsoever.
7. **The estimated rate is inclusive of all Taxes. The quotationer should quote their rate accordingly.**
8. **Bill has to be submitted with detailed break up of GST (CGST & SGST) as per the prevalent Govt. Order in this respect. All Taxes will be deducted from the gross bill as per Govt. rule.**
9. **For complying with Mahatma-Shree, the employment should first be offered to "Job Card Holders" from the fringe villagers and L1 Bidders/Contractors getting Work Order have to compulsorily submit the details as per Annexure-VI, as mandated under the scheme.**
10. Sealed Quotation will be received up to **14/01/2026 & Opened on 15/01/2026 at 11:30 A.M.**
11. The Bidders should submit PAN- Aadhaar link screen shot for authentication of PAN-Aadhaar being already linked.

Divisional Forest Officer,
Panchet Division, Bishnupur

No. 2372 (9)/02-08

Dated, Bishnupur, the: 31 / 12 / 2025

Copy forwarded for information to and wide circulation to:

1. The Chief Conservator of Forests, Central Circle, West Bengal.
2. The District Magistrate & Collector, Bankura
3. The Divisional Forest Officer, Bankura South Division, Bankura North Division & Working Plan (South) Division -II
4. The Sub- Divisional Officer, Bishnupur.
5. The Assistant Divisional Forest Officer, Panchet Division, Bishnupur.
6. The All Range Officers, Panchet Division with request to affix in the Range Notice board for wide publication.
7. Head Clerk, Panchet Division for Office Notice Board.
8. Account & Budget Section of Panchet Division.
9. Notice Board at Division Office.

Divisional Forest Officer,
Panchet Division, Bishnupur

(ANNEXURE) CDS 10

ESTIMATE FOR REPAIRING OF SUBMERSIBLE PUMP AND 2 NOS PLATFORM at MOUZA-Rajduha, JL. NO-158 , BEAT-Chingani UNDER -ONDA RANGE UNDER PANCHET DIVISION BISHNUPUR

1	Supplying & Fixing KSB make submersible pump(1 HP) including supply of stub (both end flanged) pipe necessary clamps, pressure gauge, electrical fittings including all cables (6 sq mm flat copper), star delta starter panel set, cover all complete. (As per Vetted rate by Superending Engineer, South West Electrical Circle,PWD.)	1	NOS	14500.00	14500.00
2	S & Installation 220V 1 HP composit control panel digital type (make Crompton Greavs) with angle iron frame with nut bolt asher. (As per Vetted rate by Superending Engineer, South West Electrical Circle,PWD.)	1	NOS	3367.00	3367.00
3	Supply of PVC pipes & fittings Schedule 80 (medium duty) conforming to ASTM D - 1785 and threaded to match with GI Pipes as per IS : 1239(Part - I) According to PWD Schedule 2017 (volume II) Page-13 & 14/It.no-19(III) A & B				
	80 mm dia pvc pipe	15	METRE	576.00	8640.00
	80 mm dia soket	6	NOS	180.00	1080.00
4	Supplying, fitting and fixing PVC pipes for underground work of approved make of Schedule 80 (medium duty) conforming to ASTM D -1785 and threaded to match with GI Pipes as per IS : 1239 (Part - I). with all necessary accessories, specials viz. socket, bend, tee, union, cross, elbo, nipple, longscrow, reducing socket, reducing tee, short piece etc. fitted including cost of all materials ,jointing materials, cutting pipes, making threads ,cutting trenches upto 1.5 metre below surface in all sorts of soil and refilling the same as directed complete in all respect. (Payment will be made on the centre line easurement of the total pipe line including all specials No separate Payment will be made for accessories, specials.) PVC Pipes. PWD Schedule 2017(volume II)Page-12/It.no-19 II				
	25 mm dia	64	METRE	191.00	12224.00
5	Supplying, fitting and fixing steel cutter piece upto 450 mm long with sockets. According to PWD Schedule 2017(volume II)Page-53/It.no-9	1	EACH	403.00	403.00
6	Supply of PVC pipes & fittings Schedule 80 (medium duty) conforming to ASTM D - 1785 and threaded to match with GI Pipes as per IS : 1239 (Part - I). (L) Reducing Socket (mm X mm) 150 X 80. PWD Schedule 2017 (volume II) Page-13/It.no-19(III)	1	EACH	455.00	455.00

7	Lowering of Submersible Pump Motor Set with the use of contractor's own use tools, tackles & labours as per direction of E.I.C. (As per Vetted rate by Superending Engineer, South West Electrical Circle,PWD.)	1	ITEM	2192.36	2192.36				
8	S & F being Rope Clamp with Nut Bolts & Washer (As per Vetted rate by Superending Engineer, South West Electrical Circle,PWD.)	6	NOS	61.88	371.28				
9	Washing and developing tube well with air compressor pump and engine for 8 (eight) hours continuous pumping per day with necessary arrangements for testing the yield in gallons per hour with 'V' notch including hire and labour charges for all tools and plants and scaffolding as required. According to PWD Schedule 2017(volume II)Page-55/lt.no-20	1	DAY	7538.00	7538.00				
10	Supplying, fitting and fixing PVC pipes of approved make of Schedule 80 (medium duty) conforming to ASTM D - 1785 and threaded to match with GI Pipes as per IS : 1239 (Part - I). with all necessary accessories, specials viz. socket, bend, tee, union, cross, elbo, nipple, long screw, reducing socket, reducing tee, short piece etc. fitted with holder bats clamps, including cutting pipes, making threads,fitting, fixing etc. complete in all respect including cost of all necessary fittings as required, jointing materials and two coats of painting with approved paint in any position above ground. (Payment will be made on the centre line measurements of total pipe line including all specials. No separate payment will be made for accesories, specials. Payment for painting will be made seperately) PWD Schedule 2017(volume II)Page-12/lt.no-19 I								
	15 mm dia	58	METER	101.00	5858.00				
	20 mm dia	36	METER	129.00	4644.00				
	25 mm dia	24	METER	177.00	4248.00				
11	Supplying, fitting and fixing self closing C.P.water tap of approved brand and make - 15 mm dia. According to PWD Schedule 2017(volume II)Page-10/lt.no-15GC	6	NOS	273.00	1638.00				
12	Earth work in excavation of foundation trenches or drains, in all sorts of soil (including mixed soil but excluding laterite or sandstone) including removing, spreading or stacking the spoils within a lead of 75m. as directed. The item includes necessary trimming the sides of trenches, levelling, dressing and ramming the bottom, bailing out water as required complete. (a) Depth of excavation not exceeding 1,500 mm. According to PWD Schedule, 2017Page-1/lt. no-2(a)								
	foundation	2	6.000	0.250	0.300	0.900			
	TOTAL			0.900	% Cum	11927.00	107.34		


13	Filling in foundation or plinth by silver sand in layers not exceeding 150 mm as directed and consolidating the same by thorough saturation with water, ramming complete including the cost of supply of sand. (payment to be made on measurement of finished quantity).							
	According to PWD Schedule							
		2	1.500	1.500	0.100	0.450		
		2	6.000	0.250	0.075	0.225		
	TOTAL				0.675	% Cum	37521.00	253.27
14	Single Brick Flat Soling of picked jhama bricks including ramming and dressing bed to proper level and filling joints with local sand.							
	According to PWD Schedule 2017 Page-14/lt. no-1							
		2	2.000	1.500		6.000		
	TOTAL				6.000	m ²	293.00	1758.00
15	Ordinary Cement concrete (mix 1:2:4) with graded stone chips (20 mm nominal size) excluding shuttering and reinforcement, if any, in ground floor as per relevant IS codes.							
	According to PWD Schedule 2017 Page-24/lt. No-4(a)							
		2	6.000	0.150	0.075	0.135		
		2	1.500	1.500	0.075	0.338		
	TOTAL				0.473	m ³	4218.00	1995.11
16	Brick work with 1st class bricks in cement mortar (1:6)							
	According to PWD Schedule, 2017 Page-15/lt. No-8							
	A) In Foundation & Plinth....Page-15/lt. No-8(a)							
	I) OUTER WALL	2	6.00	0.250	0.250	0.750		
	TOTAL				0.750	m ³	4695.00	3521.25
17	Plaster (to wall, floor, ceiling etc.) with sand and cement mortar including rounding off or chamfering corners as directed and raking out joints including throating, nosing and drip course, scaffolding/staging where necessary (Ground floor). [Excluding cost of chipping over concrete surface] with 1:6 cement mortar, 20mm thick plaster.							
	According to PWD Schedule 2017 Page-189/lt. no -2(i)b							
		2	6.00		0.375	4.500		
		2	1.500		1.500	4.500		
	TOTAL				9.000	m ²	153.000	1377.00

18	Neat cement punning about 1.5mm thick in wall,dado>window sill,floor etc. NOTE:Cement 0.152 cu.m per100 sq.m. According to PWD Schedule 2017 Page-192/lt.no-15				
		TOTAL	9.000	m ²	34.00
(A) CIVIL COST					306.00
(B) ELECTRIFICATION COST FOR CONNECTION *					76476.61
(1) Sub-total Cost (A+B)					3823.83
(2) 18% GST, as applicable on sl no 1					80300.44
(3) Cost of civil works excluding labour welfare cess sl no. (1+2)					14454.08
(4) Labour welfare cess @1% on sl no 3					94754.52
(5) Contingency Charge @ 3% is to be considered on Sl. No. – (3)					947.55
(6) TOTAL AMOUNT (3+4+5)					2842.64
SAY					98544.71
(IN WORDS: NINETY EIGHT THOUSAND FIVE HUNDRED FORTY FIVE) ONLY					98545.00

* Electrification cost for repairing of 1 H.P Submersible pump has kept at around 5% of total civil cost and has been found feasible from previous experience of carried out similar nature of work.


ANUP MAHATA
(Reg.-01293) D.C E.
Khetra, Bankura


Divisional Forest Officer
Panchet Division
Bishnupur



Divisional Forest Officer
Panchel Division, Bishnupur